



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313


LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

| | | | | | | |
|--------------|-------------------|----------------------|---|--|------------------------------|---------|
| HV/HT | 480Y/277V | | | | Cust. Ref. Réf. du client | |
| BIL | - | | | | Serial No. No. de série | |
| TERM. BORNES | H0 H1 H2 H3 | | | | Part No. No. de pièce | DM011BK |
| | VOLTS | CURRENT COURANT | % RATED VOLTAGE % TENSION NOMINALE | CONNECTION EACH PHASE CONNEXION PAR PHASE | kVA | 11 |
| | 218 208 198 | 29.1 30.5 32.1 | 105 100 95 | 1-2 2-3 3-4 | TYPE | K |
| | 208V | | | | LV/BT | |
| | - | | | | BIL | |
| TERM. BORNES | X1 X2 X3 | | | | Wt lbs Poids | 165 |
| | | | | | Winding Enroulement | AL |

| | |
|--------------------------------|--------|
| Cooling Refroidissement | ANN |
| Temp. Rise Echauffement | 150 °C |
| Temp. Class Classe de Temp. | 220 °C |
| Frequency Fréquence | 60 Hz |
| Impédance % @ 170 °C | 4.9 |
| Encl. Type Type de boîtier | 3R |

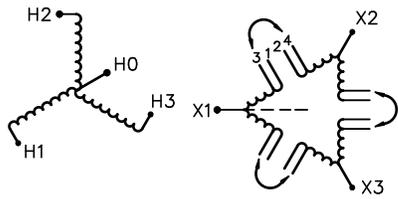

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES
TRANSFORMER SUITABLE FOR STEP UP OPERATION ONLY

4003102b




| | | | | |
|--|----------|----|------------|----------------|
| TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION | | | | |
| 2 | 21/07/13 | PP | EDB UPDATE | DES: MBURSAC |
| 1 | 16/04/19 | MA | HCN: 62971 | DATE: 03/09/02 |
| NO. | DATE | BY | REVISION | SCALE: NTS |


SHEET 1 OF 2
EDBDM011BK

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.
2.0 http://www.hammond.com/04/01 03:01

FRONT VIEW

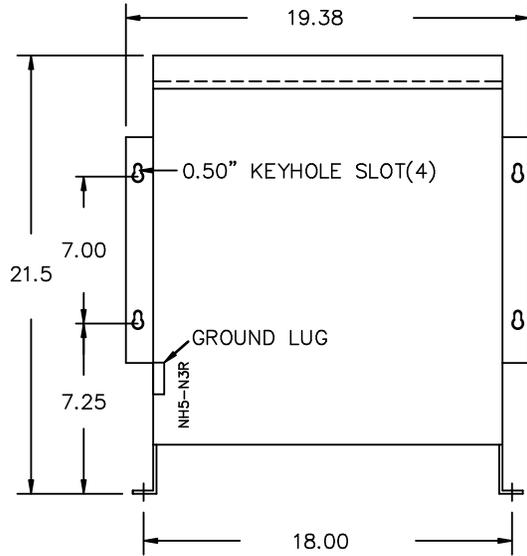

SIDE VIEW

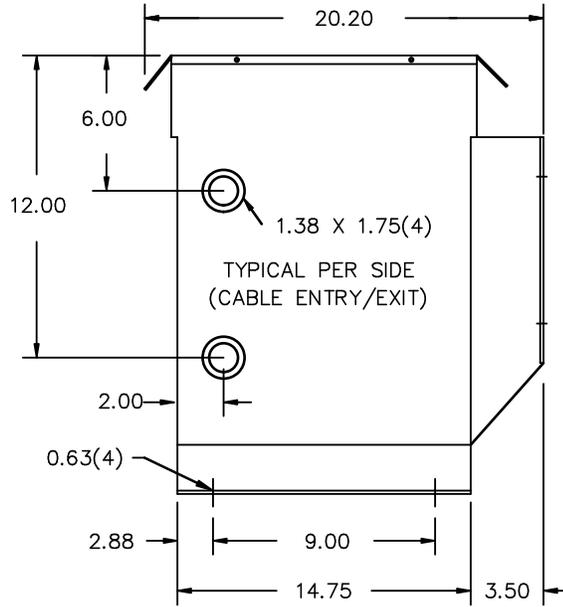

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT BOTTOM FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

| | | | | |
|-----|----------|----|------------|----------------|
| 2 | 21/07/13 | PP | EDB UPDATE | DES: MBURSAC |
| 1 | 16/04/19 | MA | HCN: 62971 | DATE: 03/09/02 |
| NO. | DATE | BY | REVISION | SCALE: NTS |

SHEET 2 OF 2

EDBDM011BK