



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

| | | | | | | |
|--------------|-------------------|----------------------|---------------------------------------------|----------------------------------------------------|--------------------------------|---------|
| HV/HT | 230V | | | | Cust. Ref. Réf. du client | |
| BIL | - | | | | Serial No. No. de série | |
| TERM. BORNES | H1 H2 H3 | | | | Part No. No. de pièce | DM014CC |
| | VOLTS | CURRENT COURANT | % RATED VOLTAGE % TENSION NOMINALE | CONNECTION EACH PHASE CONNEXION PAR PHASE | kVA | 14 |
| | 242 230 218 | 33.5 35.1 37.0 | 105 100 95 | 1 2 3 | TYPE | K |
| | 230Y/133V 35.1A | | | | Cooling Refroidissement | ANN |
| LV/BT | | | | | Temp. Rise Echauffement | 150 °C |
| BIL | - | | | | Temp. Class Classe de Temp. | 220 °C |
| TERM. BORNES | X0 X1 X2 X3 | | | | Frequency Fréquence | 60 Hz |
| | | | | | Impédance % @ 170 °C | 5.1 |
| | | | | | Encl. Type Type de boîtier | 3R |
| | | | | | Wt Poids lbs/kg | 170/78 |
| | | | | | Winding Enroulement | AL |



SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES

4003102b



THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.




TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION

| | | | | |
|-----|----------|----|------------|----------------|
| 8 | 24/08/13 | AO | EDB UPDATE | DES: MBURSAC |
| 7 | 21/07/13 | PP | EDB UPDATE | DATE: 01/01/24 |
| NO. | DATE | BY | REVISION | SCALE: NTS |

SHEET 1 OF 2

EDBDM014CC

8.1 http 2026/06/24 21:06

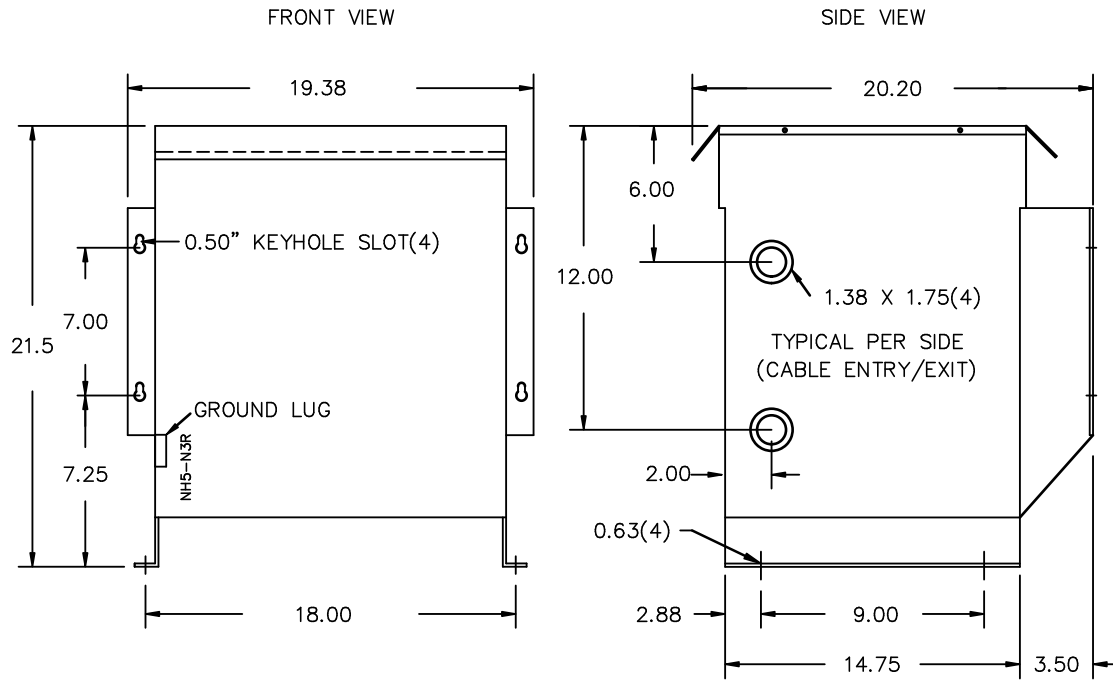

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

| | | | | |
|-----|----------|----|------------|----------------|
| 8 | 24/08/13 | AO | EDB UPDATE | DES: MBURSAC |
| 7 | 21/07/13 | PP | EDB UPDATE | DATE: 01/01/24 |
| NO. | DATE | BY | REVISION | SCALE: NTS |

SHEET 2 OF 2

EDBDM014CC

8.1 httpd 2026/06/24 21:06

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.