hammond POWER SOLUTIONS

LR3902 LISTED E50394

GENERAL PURPOSE TRANSFORMER 252L

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	120/208/240/277V
BIL	–
TERM. BORNES	H1 H2 H3 H4 H5

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
120	8.7		H1–H2
208	5		H1–H3
240	4.3		H1–H4
277	3.8		H1–H5

LV/BT	120/240V 8.3/4.2A
BIL	–
TERM. BORNES	X4 X2 X3 X1

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	C1F1C0WES
Phase	1
kVA	1
TYPE	Q
Cooling Refroidissement	ANC
Temp. Class Classe de Temp.	130 °C
Frequency Fréquence	60 Hz
Impédance % @ °C	
Encl. Type Type de boîtier	3R
Wt Poids lbs/kg	35.3/16



ELECTROSTATIC SHIELD

D0000151Rev1

8 03423 09253 5

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

4.0 httpd 2026/11/05 04:39

hammond POWER SOLUTIONS


TITLE: 1 PHASE ENCAPSULATED TRANSFORMER NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	
4	26/04/17	MS	UPDATED PER NEW DESIGN	DES: LCEN
3	26/03/25	LC	CHANGED NPL VER:	DATE: 08/11/25
				SCALE: NTS


SHEET 1 OF 2

EDBC1F1C0WES

FRONT VIEW

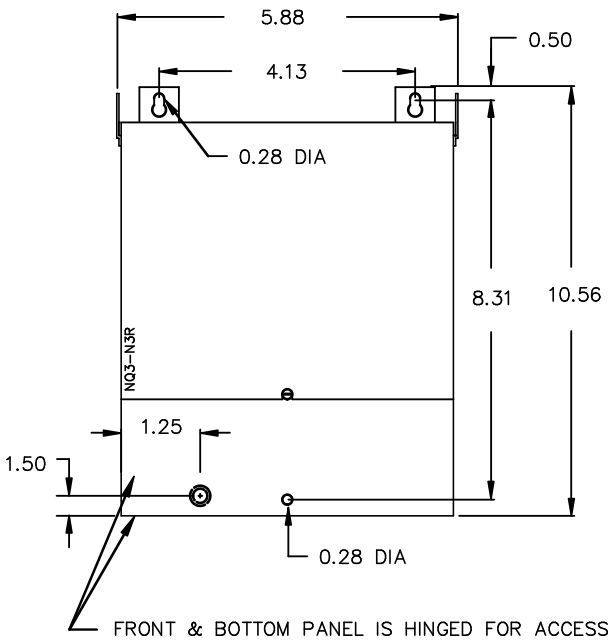

SIDE VIEW

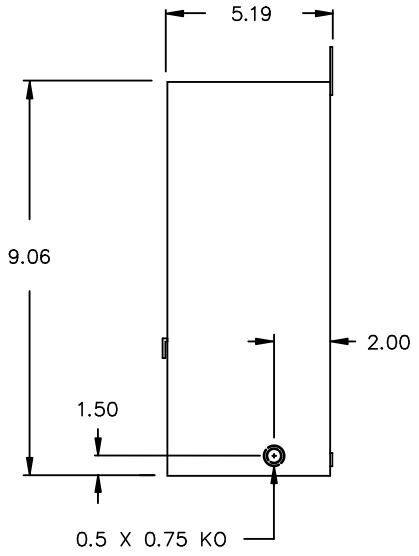

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:
- HV TERMINATED AT #14 AWG LEAD WIRE
- LV TERMINATED AT #14 AWG LEAD WIRE

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

4.0 httpd 2026/11/05 04:39

hammond POWER SOLUTIONS

TITLE: 1 PHASE ENCAPSULATED TRANSFORMER

NO.	DATE	BY	REVISION	
4	26/04/17	MS	UPDATED PER NEW DESIGN	DES: LCEN
3	26/03/25	LC	CHANGED NPL VER:	DATE: 08/11/25
				SCALE: NTS

SHEET 2 OF 2

EDBC1F1COWES