




GENERAL PURPOSE TRANSFORMER 252L E50394

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

HPS FORTRESS™
COMMERCIAL POTTED DISTRIBUTION TRANSFORMER

HV/HT	277/480V			Cust. Ref.	
BIL	-			Réf. du client	
TERM. BORNES	H1 H2 H3			Serial No. No. de série	
				Part No. No. de pièce	C1FC75HRS
				Phase	1
				kVA	0.75
				TYPE	Q
				Cooling Refroidissement	ANC
				Temp. Class. Classe de Temp.	130 °C
				Frequency Fréquence	50/60Hz
				Impédance % @ °C	
				Encl. Type Type de boîtier	3R
				Wt Poids lbs/kg	32.8/14.9
LV/BT	277/208V				
BIL	-				
TERM. BORNES	X3 X2 X1				

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNECTION PAR PHASE
277	2.8		H1-H2
480	1.6		H1-H3
208	3.6		X1-X2
277	2.7		X1-X3



ELECTROSTATIC SHIELD

1 W/4H51 0000P




TITLE: 1 PHASE ENCAPSULATED TRANSFORMER
NAMEPLATE INFORMATION

4	26/04/17	MS	UPDATED PER NEW DESIGN	DES: LCEN
3	23/10/13	LC	CHANGED NPL VER:	DATE: 08/11/18
NO.	DATE	BY	REVISION	SCALE: NTS


SHEET 1 OF 2

EDBC1FC75HRS

FRONT VIEW

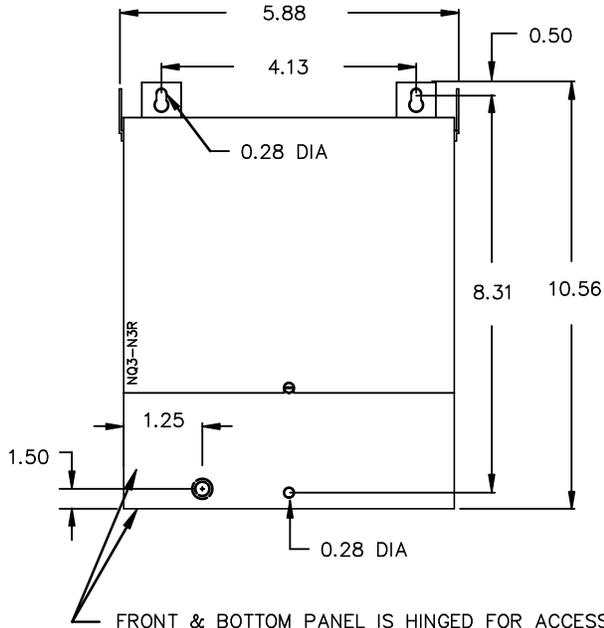

SIDE VIEW

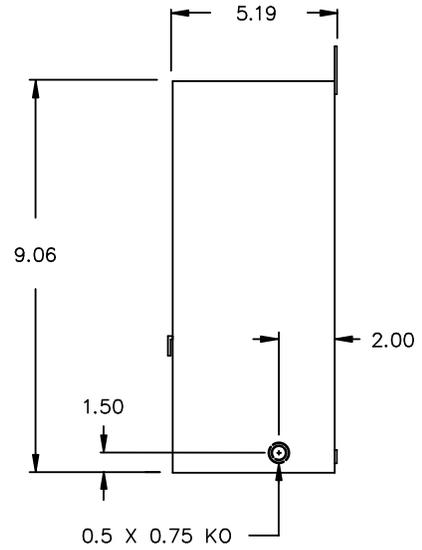

FRONT & BOTTOM PANEL IS HINGED FOR ACCESS TO TERMINALS, BOTTOM MOUNTING HOLES AND REAR KNOCKOUT.

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:

- HV TERMINATED AT #18 AWG LEAD WIRE
- LV TERMINATED AT #14 AWG LEAD WIRE



TITLE: 1 PHASE ENCAPSULATED TRANSFORMER

4	26/04/17	MS	UPDATED PER NEW DESIGN	DES: LCEN
3	23/10/13	LC	CHANGED NPL VER:	DATE: 08/11/18
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBC1FC75HRS