



REACTOR




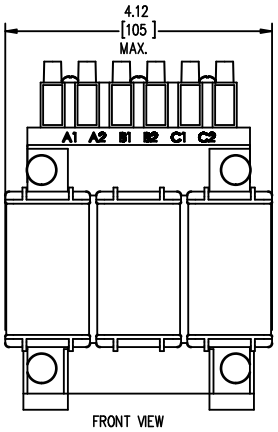



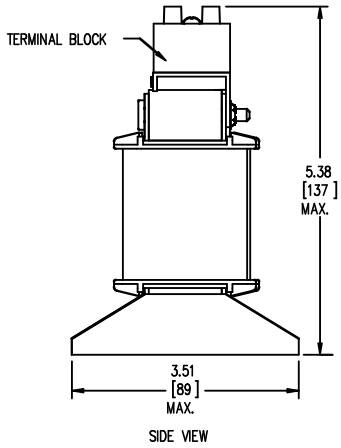

TERMINAL BLOCK SUITABLE FOR #13 TO #10 AWG CONDUCTORS QTY. 1 PER PHASE



hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

CRX0024AC

0.41MH 50/60 HZ 24 AMPS

0.6 KV CLASS TEMP CLASS: 130 TYPE JR-1

TERMINAL TORQUE: 11 LB-IN AMBIENT: 50°C

NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.0 httpd 2026/11/04 22:30

hammond POWER SOLUTIONS

TITLE: 3 PHASE LINE REACTOR

NO.	DATE	BY	REVISION	
				DES: PBAKER
				DATE: 14/06/24
				SCALE: NTS

SHEET 1 OF 1

EDBCRX0024AC