





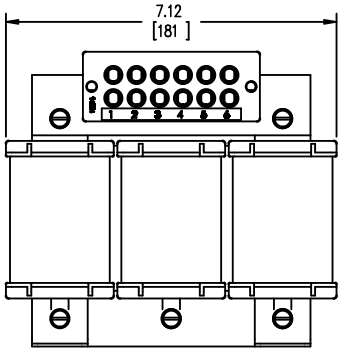

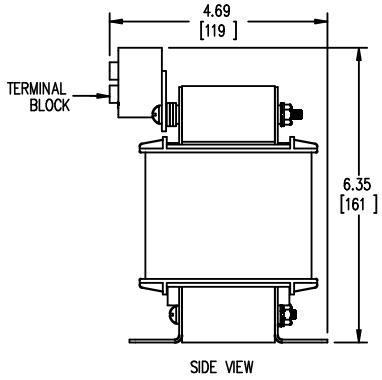

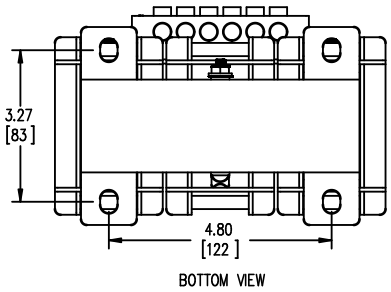

TERMINAL BLOCK
SUITABLE FOR
#14 TO #4 AWG
CONDUCTORS
QTY. 1 PER PHASE



hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

MADE IN CANADA P/N CRX0052AC

f003776aeur

INDUCT. 0.50 mH Hz 50/60 AMPS 52 IP00

0.6 kV CLASS TEMP CLASS 180°C TYPE JR

WEIGHT 20/10 (LBS/KG) AMBIENT: 50°C E61431 LR3902

NOTES: A1 A2 B1 B2 C1 C2

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

1.0 httpd 2026/11/05 00:43

hammond POWER SOLUTIONS

TITLE: 3 PHASE LINE REACTOR

NO.	DATE	BY	REVISION	
1	24/05/21	PB	HCN: 80927	DES: PBAKER
				DATE: 14/06/25
				SCALE: NTS

SHEET 1 OF 1

EDBCRX0052AC