



TITLE: 1PH DISTRIBUTION TRANSFORMER  
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	SCALE:
2	21/07/16	PP	EDB UPDATE	DES: RMOVVA
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/11/29
				SCALE: NTS

SHEET 1 OF 4

EDBSG3M0015XE0C

2.0 httpd 2026/06/03 12:01



**POWER SOLUTIONS**  
Guelph, ONT  
Hyderabad, IN Compton, CA

**hammond** HPS Sentinel™ G  
Energy Efficient Distribution Transformer  
Transformateur de Distribution à Bon Rendement Énergétique

Baraboo, WI  
Monterrey, MX

Part No. SG3M0015XE0C

Cust. Ref. [ ] Serial No. [ ]  
Ref. du Client [ ] No. de Serie [ ]

Phase 1 HV/HT 220X440V 68.2X34.1A

Type F BIL 10 kV

Cooling Refroidissement ANN Term Bornes H1 H3 H2 H4

kVA 15 LV/BT 120/240V 125.0/62.5A

Temp. Rise Echauffement 150 °C BIL 10 kV

Temp Class Classe Temp 220 °C Term Bornes X4 X2 X3 X1

Winding Enroulement CU Energy Regulations DOE 10 CFR PART 431:2016

Frequency Fréquence Hz 60 Reglements de l'Energétique CEE ACT SOR/2018-201

Impedance % @ 170 °C 5.9

Encl. Type Type de Coffrage 3R

Weight Poids lbs 190


UL LR 3902  
DRY TYPE TRANSFORMER 77US E112313  
8 03423174139 4  
ALSO REFER TO STANDARD CRO20-18 BY UNDERWRITERS LABORATORIES INC. @ 316

LISTED

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES  
ESPACEMENTS ENTRE LES PANNEAUX DE BOTTIER VENTILE ET LES MURS ADJACENT DOIVENT ÊTRE UN MINIMUM DE 3 POUNCES

SUITABLE FOR OPERATION AT 50 HZ

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNECTION PAR PHASE
440	34.1		H1, H4
416	36.1		H1, H4
400	37.5		H1, H4
380	39.5		H1, H4
220	68.2		H1&H3, H2&H4
208	72.1		H1&H3, H2&H4
200	75.0		H1&H3, H2&H4
190	78.9		H1&H3, H2&H4

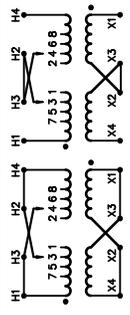

SEISMIC QUALIFICATIONS:  
OSP=0136/IBC 2018/ASCE 7-16  
SDS<=2.0g Z/h=1 Ip=1.5

d000186hb

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

PRIMARY VOLTS	CONNECTION LINES TO	INTER-CONNECT
440	H1,H4	1-H2,2-H3,H2-H3
416	H1,H4	3-H2,4-H3,H2-H3
400	H1,H4	5-H2,6-H3,H2-H3
380	H1,H4	7-H2,8-H3,H2-H3
220	H1,H4	1-H2,2-H3,H1-H3,H2-H4
208	H1,H4	3-H2,4-H3,H1-H3,H2-H4
200	H1,H4	5-H2,6-H3,H1-H3,H2-H4
190	H1,H4	7-H2,8-H3,H1-H3,H2-H4
SECONDARY VOLTS	CONNECTION LINES TO	INTER-CONNECT
240	X1,X4	X2-X3
120	X1,X4	X1-X3,X2-X4
120/240	X1,X2,X4	X2-X3




TITLE: 1PH DISTRIBUTION TRANSFORMER  
ENCLOSURE BOTTOM VIEW

2	21/07/16	PP	EDB UPDATE	DES: RMOVVA
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/11/29
NO.	DATE	BY	REVISION	SCALE: NTS


SHEET 2 OF 4

EDBSC3M0015XEDC

FRONT VIEW

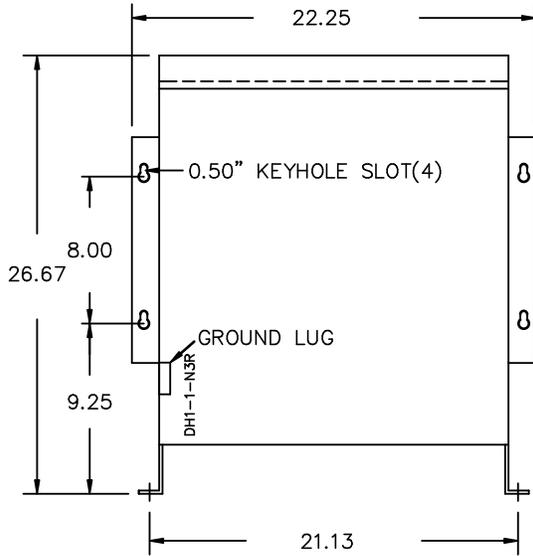

SIDE VIEW

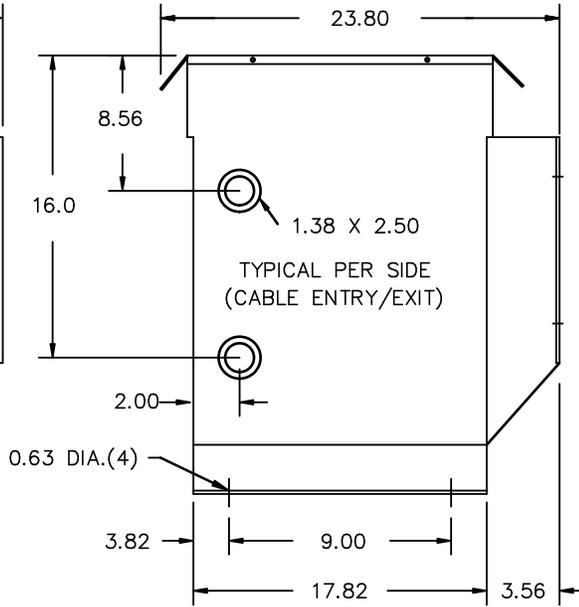

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED  
SUITABLE FOR #14-2 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT



TITLE: 1PH DISTRIBUTION TRANSFORMER

2	21/07/16	PP	EDB UPDATE	DES: RMOVVA
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/11/29
NO.	DATE	BY	REVISION	SCALE: NTS


SHEET 3 OF 4

EDBSC3M0015XEDC

2.0 httpd 2026/06/03 12:01

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

ENCLOSURE BOTTOM VIEW

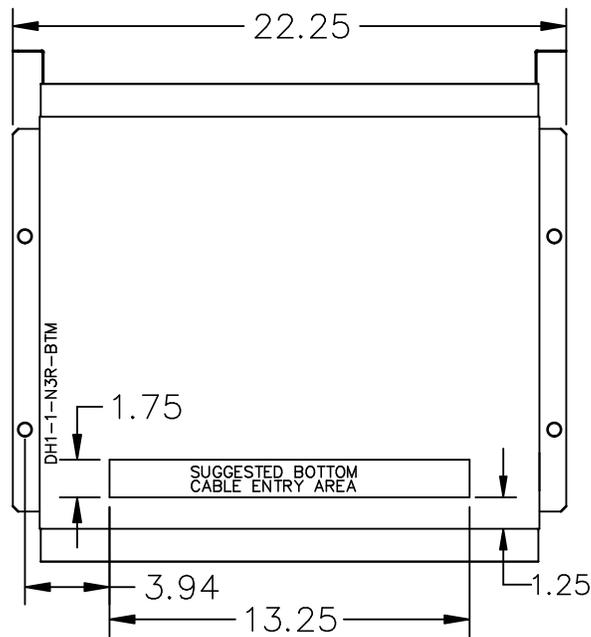

NOTE:  
 WHEN BOTTOM CABLE ENTRY IS OPTED, THE SPACE USED FOR CONDUITS IN THE FRONT OF THE TRANSFORMER SHOULD NOT OBSTRUCT MORE THAN 50% OF THE FRONT AIR INTAKE AREA DEFINED BETWEEN THE BOTTOM PLATE AND THE SUPPORTING LEGS.  
 SEE MANUAL FOR ADDITIONAL INFORMATION



TITLE: 1PH DISTRIBUTION TRANSFORMER

2	21/07/16	PP	EDB UPDATE	DES: RMOVVA
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/11/29
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 4 OF 4

EDBSC3M0015XEOC