



TITLE: 1PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	DES:
2	21/07/16	PP	EDB UPDATE	DCORTEZ
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/09/07
				SCALE: NTS

SHEET 1 OF 4

EDBSG3M0050XE

2.0 httpd 2026/04/01 14:55

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



POWER SOLUTIONS
Guelph, ONT
Hyderabad, IN Compton, CA

HPS Sentinel™ G
Energy Efficient Distribution Transformer
Transformateur de Distribution à Bon Rendement Énergétique

Baraboo, WI
Monterrey, MX

Part No. **SG3M0050XE**

hammond LR 3902
DRY TYPE DISTRIBUTION TRANSFORMER
E112313

8 03423 174134 9
ALSO REFER TO THE ENERGY STANDARDS CRO20-18 BY UNDERWRITERS LABORATORIES INC. @ 316

0000186hb


Cust. Ref. Ref. du Client	Serial No. No. de Serie	HV/HT	220X440V	227X114A	CONNECTION EACH PHASE CONNECTION PAR PHASE
1	F	BIL	10 kV	H1, H4	H1, H4
ANN	Term Bornes	H1 H3 H2 H4		H1, H4	H1, H4
50	LV/BT	120/240V	417/208A	H1&H3, H2&H4	H1&H3, H2&H4
150 °C	BIL	10 kV		H1&H3, H2&H4	H1&H3, H2&H4
220 °C	Term Bornes	X4 X2 X3 X1			
AL	Energy Regulations	DOE 10 CFR PART 431:2016			
60	Reglements de l'Energétique	CEE ACT SOR/2018-201			
5.9					
3R	Encl. Type Type de Coffrage				
380	Weight Poids				

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNECTION PAR PHASE
440	114		H1, H4
416	120		H1, H4
400	125		H1, H4
380	132		H1, H4
220	227		H1&H3, H2&H4
208	240		H1&H3, H2&H4
200	250		H1&H3, H2&H4
190	263		H1&H3, H2&H4

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES
ESPACEMENTS ENTRE LES PANNEAUX DE BOTTIER VENTILE ET LES MURS ADJACENT DOIVENT ÊTRE UN MINIMUM DE 3 POUNCES

SUITABLE FOR OPERATION AT 50 HZ

SEISMIC QUALIFICATIONS, FLOOR MOUNT ONLY
QUALIFICATIONS SISMIQUES, MONTAGE AU SOL SEULEMENT
OSP-01.36-10 IBC 2012/ASCE 7-10
SDS<=2.06 Z/H=1 IP=1.5

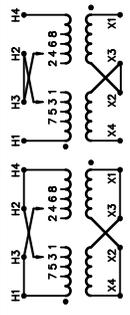

PRIMARY VOLTS	CONNECTION LINES TO	INTER-CONNECT
440	H1,H4	1-H2,2-H3,H2-H3
416	H1,H4	3-H2,4-H3,H2-H3
400	H1,H4	5-H2,6-H3,H2-H3
380	H1,H4	7-H2,8-H3,H2-H3
220	H1,H4	1-H2,2-H3,H1-H3,H2-H4
208	H1,H4	3-H2,4-H3,H1-H3,H2-H4
200	H1,H4	5-H2,6-H3,H1-H3,H2-H4
190	H1,H4	7-H2,8-H3,H1-H3,H2-H4
SECONDARY VOLTS	CONNECTION LINES TO	INTER-CONNECT
240	X1,X4	X2-X3
120	X1,X4	X1-X3,X2-X4
120/240	X1,X2,X4	X2-X3




TITLE: 1PH DISTRIBUTION TRANSFORMER
CONNECTION CHART

2	21/07/16	PP	EDB UPDATE	DES: DCORTEZ
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/09/07
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 4

EDBSC3M0050XE

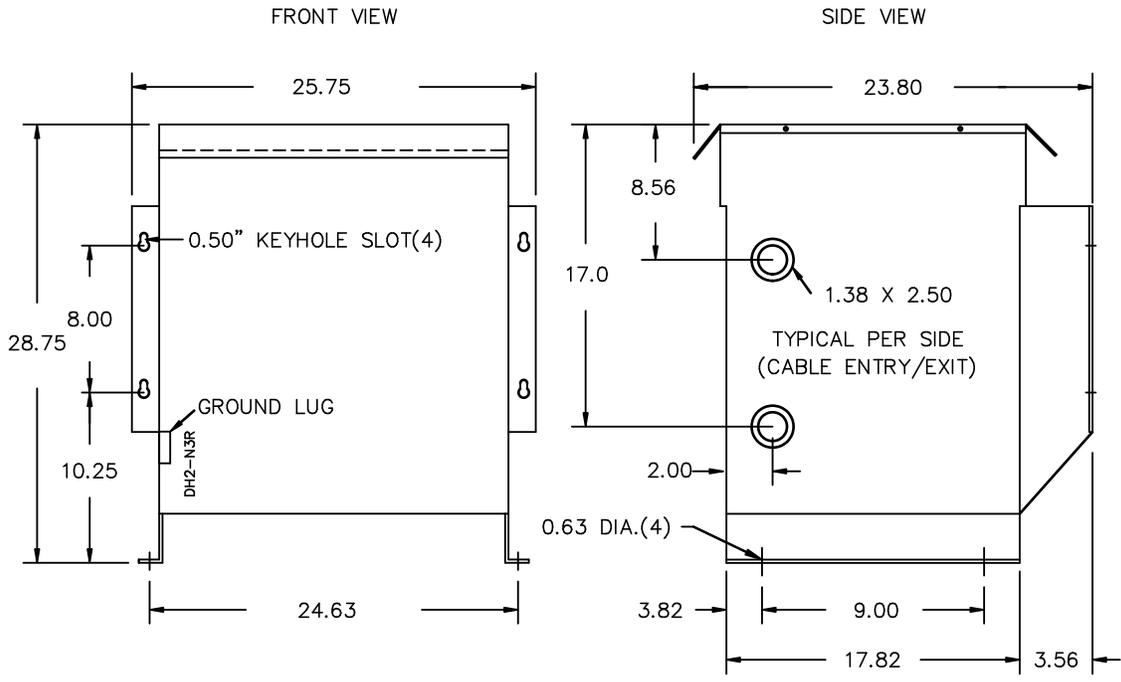

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 600MCM-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT




TITLE: 1PH DISTRIBUTION TRANSFORMER

2	21/07/16	PP	EDB UPDATE	DES: DCORTEZ
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/09/07
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 3 OF 4

EDBSC3M0050XE

ENCLOSURE BOTTOM VIEW

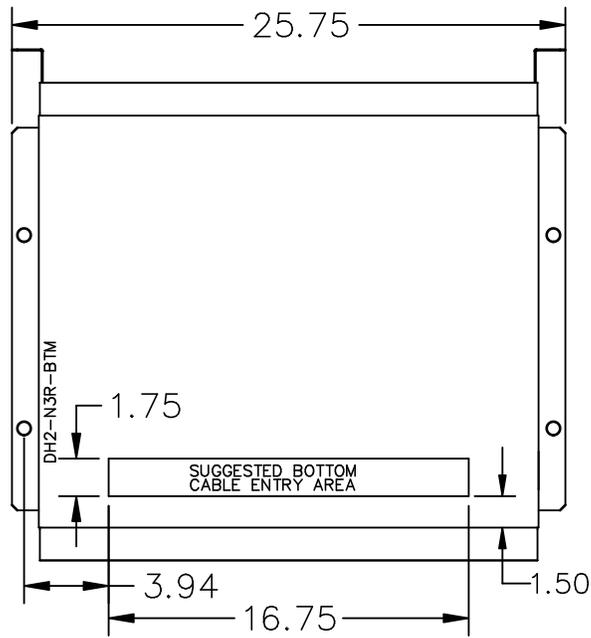

NOTE:
 WHEN BOTTOM CABLE ENTRY IS OPTED, THE SPACE USED FOR CONDUITS IN THE FRONT OF THE TRANSFORMER SHOULD NOT OBSTRUCT MORE THAN 50% OF THE FRONT AIR INTAKE AREA DEFINED BETWEEN THE BOTTOM PLATE AND THE SUPPORTING LEGS.
 SEE MANUAL FOR ADDITIONAL INFORMATION



TITLE: 1PH DISTRIBUTION TRANSFORMER
 ENCLOSURE BOTTOM VIEW

2	21/07/16	PP	EDB UPDATE	DES: DCORTEZ
1	20/03/17	PP	SEISMIC UPDATE	DATE: 17/09/07
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 4 OF 4

EDBSC3M0050XE