




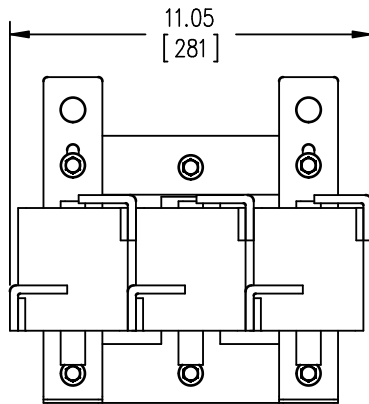


FRONT VIEW

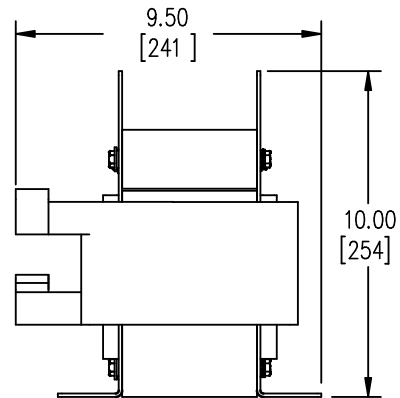


SIDE VIEW

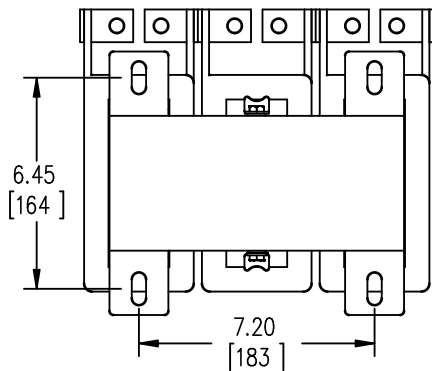

BOTTOM VIEW



TERMINAL DETAIL



MTG SLOT DETAIL



TOLERANCES
MOUNTING CENTERS = $\pm .06"$
MOUNTING HOLE SIZE = $\pm .005"$

THIS DRAWING CONTAINS PROPRIETARY INFORMATION
BELONGING TO HAMMOND POWER SOLUTIONS INC.,
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches
mm in Parenthesis

REACTOR

hammond 
POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

P/N CRX0183PC

INDUCT. 0.19MH 50/60 HZ 183AMPS

0.6 KV CLASS WT: 87/40 lbs/kg IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e



MADE IN CANADA
IND. CONT. EQ. E61431

NOTES:

hammond 
POWER SOLUTIONS

TITLE: PROTOTYPE REACTOR

DES: MVAGHANI
DATE: 26/06/23
SCALE: NTS

SHEET 1 OF 1

EDBCRX0183PC

0.0 httpd 2026/07/22 06:44

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.