hammond POWER SOLUTIONS

LR 3902

GENERAL PURPOSE TRANSFORMER 252L E50394 LISTED

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX


THREE PHASE DRY TYPE AUTOTRANSFORMER
AUTOTRANSFORMATEUR SEC TRIPHASÉ

HV/HT	600Y/346V 480Y/277V
BIL	–
TERM. BORNES	H0 H1 H2 H3 H4 H5 H6

VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE
600Y/346V	8.7		H0 H1-H2-H3
480Y/277V	10.8		H0 H4-H5-H6
400Y/231V	13.0		X0 X7-X8-X9
240Y/139V	21.7		X0 X4-X5-X6
208Y/120V	25.0		X0 X1-X2-X3

LV/BT	208Y/120V 240Y/139V 400Y/231V
BIL	–
TERM. BORNES	X0 X1 X2 X3 X4 X5 X6 X7 X8 X9

Cust. Ref. Réf. du client	
Serial No. No. de série	
Part No. No. de pièce	Y009QTCF3L0U
kVA	9
TYPE	QT
Cooling Refroidissement	ANC
Temp. Rise Échauffement	115 ° C
Temp. Class Classe de Temp.	180 ° C
Frequency Fréquence	60 Hz
Impédance % @ 135 °C	2.2
Encl. Type Type de boîtier	3R
Wt Poids lbs	138
Winding Enroulement	COPPER



HAM3656

VOLTAGES SHOWN ARE FOR 3 PHASE, 4 WIRE SYSTEMS. NEUTRAL AND GROUND CONNECTIONS SHOULD BE MADE IN ACCORDANCE WITH LOCAL ELECTRICAL CODE AND STANDARDS REQUIREMENTS

d00333351

8 03423 13775 5

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.0 httpd 2026/11/05 23:38

hammond POWER SOLUTIONS

TITLE: 3 PH ENCAPSULATED AUTO TRANSFORMER NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION

DES: WWONG
DATE: 16/08/10
SCALE: NTS


SHEET 1 OF 2

EDBY009QTCF3L0U

FRONT VIEW

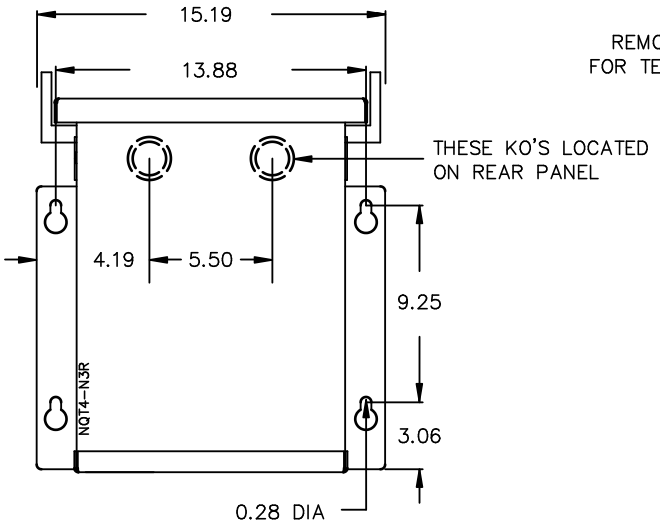

SIDE VIEW

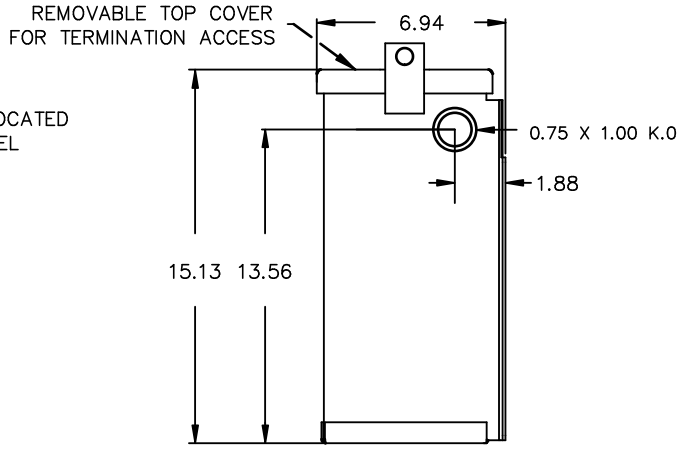

All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

CUSTOMER NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3 PH ENCAPSULATED AUTO TRANSFORMER

NO.	DATE	BY	REVISION

DES: WWONG
DATE: 16/08/10
SCALE: NTS

SHEET 2 OF 2

EDBY009QTCF3L0U

0.0 httpd 2026/11/05 23:38