
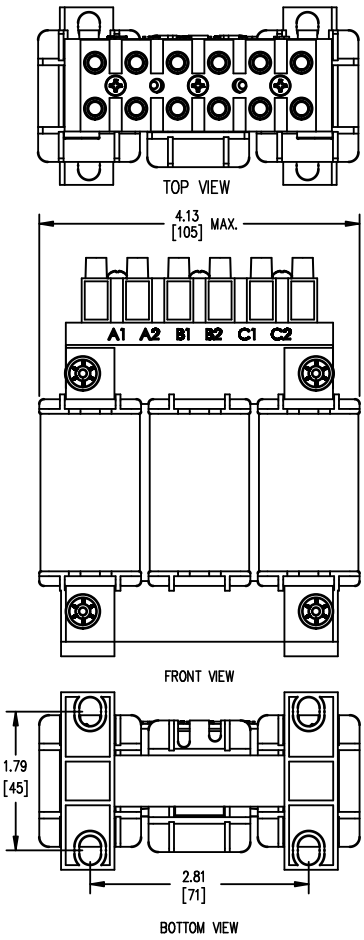
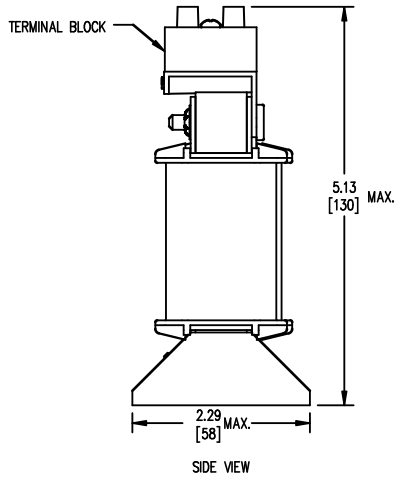



TERMINAL BLOCK SUITABLE FOR #14 TO #18 AWG CONDUCTORS QTY. 1 PER PHASE




LR 3902
E61431
IP00

| | | | | |
|---|---|---|---|---|
| hammond POWER SOLUTIONS | TOLERANCES<br>MOUNTING CENTERS = +/- .06"<br>MOUNTING HOLE SIZE = +/- .005" | THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION | All Dimensions in Inches<br>mm in Parenthesis | REACTOR |

hammond
POWER SOLUTIONS

# HPS CENTURION R 3PH DRY TYPE REACTOR

# CRX02D4DC

## 7.1MH 50/60 HZ 2.4 AMPS

## 0.6 KV CLASS TEMP CLASS: 130 TYPE JR-1

## TERMINAL TORQUE: 5 LB-IN AMBIENT: 50°C

NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond
POWER SOLUTIONS

TITLE: 3 PHASE LINE REACTOR

| NO. | DATE | BY | REVISION |
|---|---|---|---|
| | | | |
| | | | |

DES: PBAKER
DATE: 14/06/25
SCALE: NTS

SHEET 1 OF 1

EDBCRX02D4DC

0.0 httpd 2026/11/05 07:13