

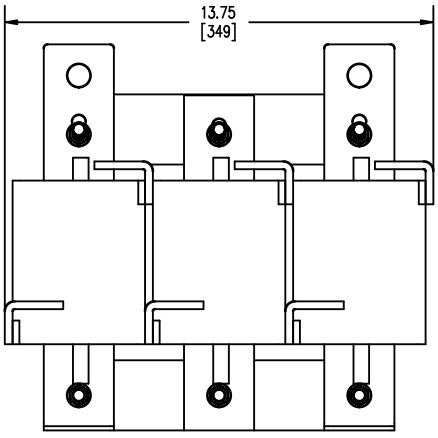



FRONT VIEW

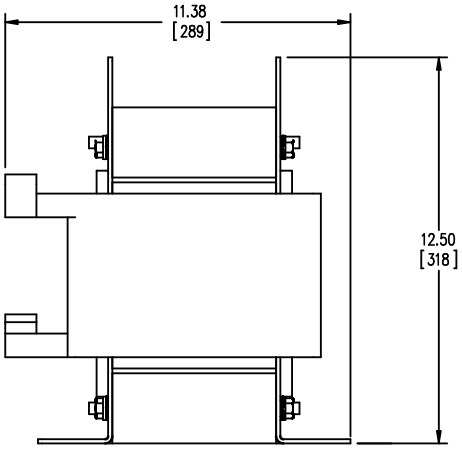


SIDE VIEW

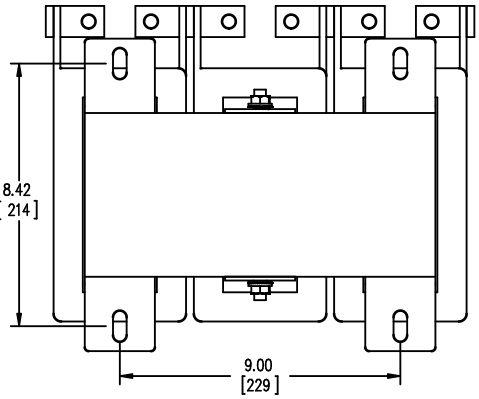

BOTTOM VIEW



TERMINAL DETAIL



MTG SLOT DETAIL

hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

P/N CRX0361BC

INDUCT. 0.10MH 50/60 HZ 361AMPS

0.6 KV CLASS WT: 147 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e

CE

SA® LR3902

UL® LISTED IND. CONT. EQ. E61431

MADE IN CANADA

NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: PROTOTYPE REACTOR

NO.	DATE	BY	REVISION

DES: PBAKER

DATE: 14/07/04

SCALE: NTS

SHEET 1 OF 1

EDBCRX0361BC

0.1 httpd 2026/11/04 04:01