

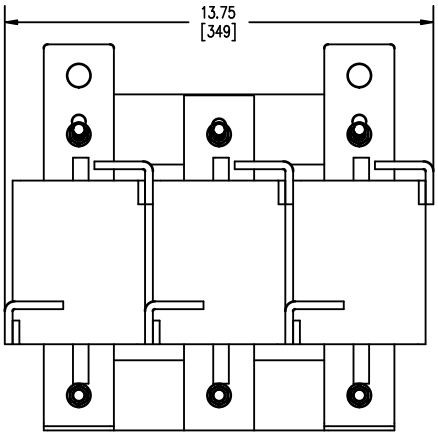



FRONT VIEW

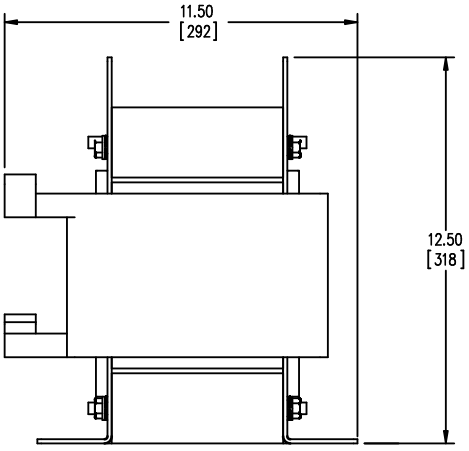


SIDE VIEW

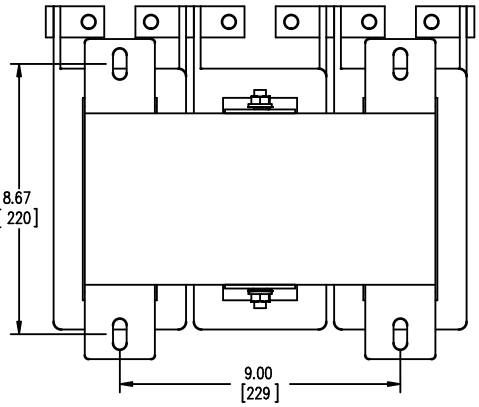

BOTTOM VIEW



TERMINAL DETAIL



MTG SLOT DETAIL

hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

P/N CRX0472BC

INDUCT. 0.097 MH 50/60 HZ 472 AMPS

0.6 KV CLASS WT: 171 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e

LR3902

IND. CONT. EQ. E61431 LISTED

MADE IN CANADA

NOTES:

hammond POWER SOLUTIONS

TITLE:	PROTOTYPE REACTOR				
				DES: PBAKER	SHEET 1 OF 1
				DATE: 14/07/04	EDBCRX0472BC
NO.	DATE	BY	REVISION	SCALE: NTS	

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.1 httpd 2026/11/04 21:39