


THIS DRAWING CONTAINS STRICKLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

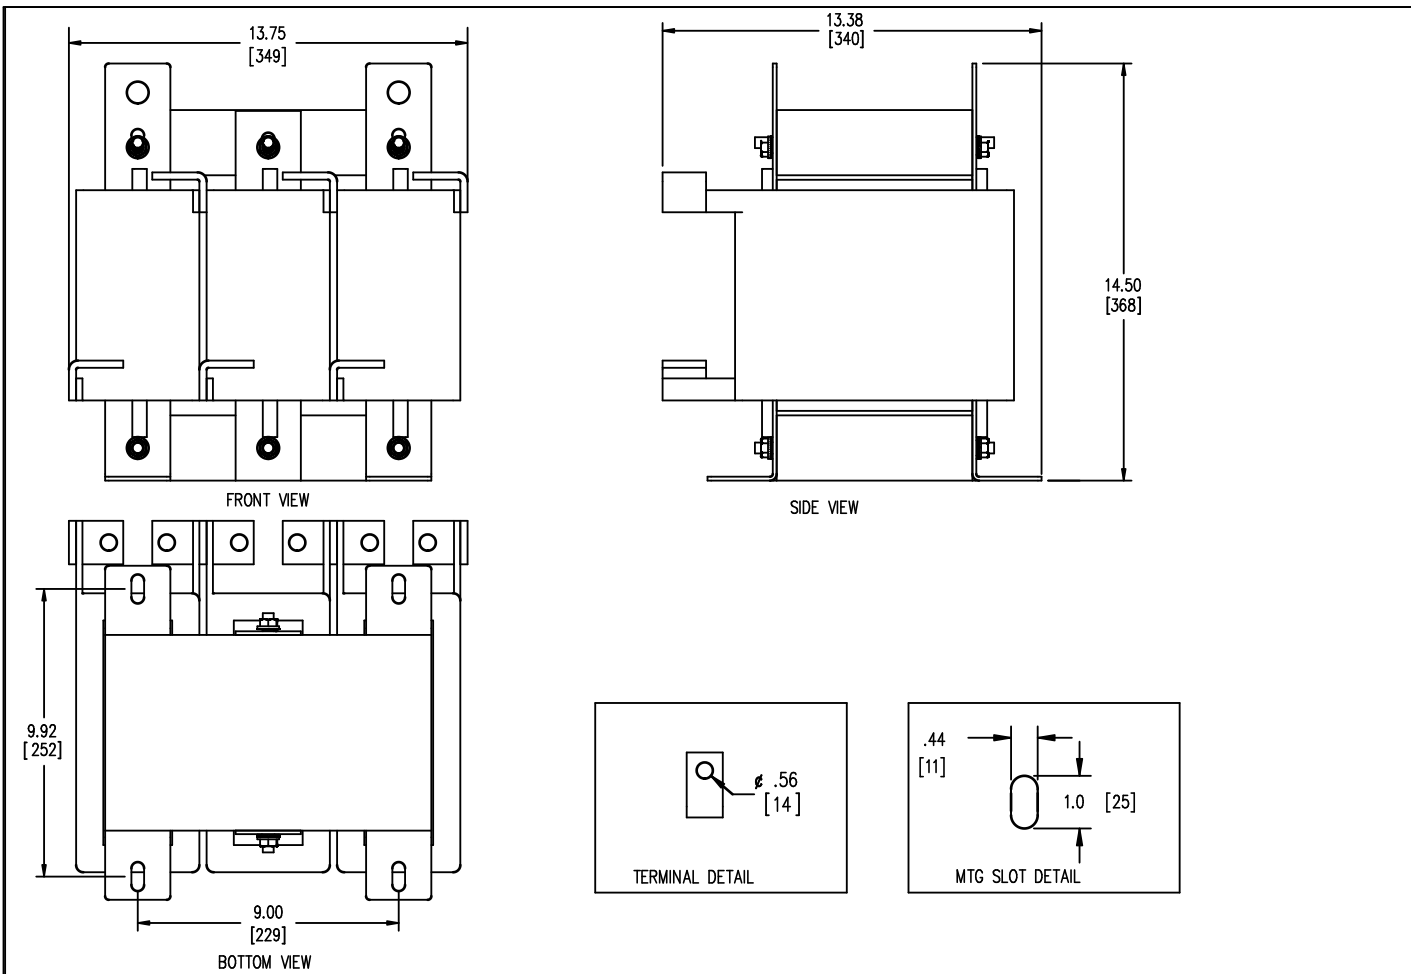

	<p>TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"</p>	<p>THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION</p>	<p>All Dimensions in Inches mm in Parenthesis</p>	<p>REACTOR</p>
--	--	---	---	----------------

hammond
POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

P/N CRX0477BC

INDUCT. 0.076 MH 50/60 HZ 477 AMPS

0.6 KV CLASS WT: 220 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-2

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

MADE IN CANADA
 LR3902
 IND. CONT. EQ. E61431
 LISTED

f003782e

NOTES:

		<p>TITLE: PROTOTYPE REACTOR</p> <table border="1"> <tr> <td>DES:</td> <td>PBAKER</td> </tr> <tr> <td>DATE:</td> <td>14/07/04</td> </tr> <tr> <td>SCALE:</td> <td>NTS</td> </tr> </table>	DES:	PBAKER	DATE:	14/07/04	SCALE:	NTS	<p>SHEET 1 OF 1 EDBCRX0477BC</p>
DES:	PBAKER								
DATE:	14/07/04								
SCALE:	NTS								
NO.	DATE	BY	REVISION						