


THIS DRAWING CONTAINS STRICKLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

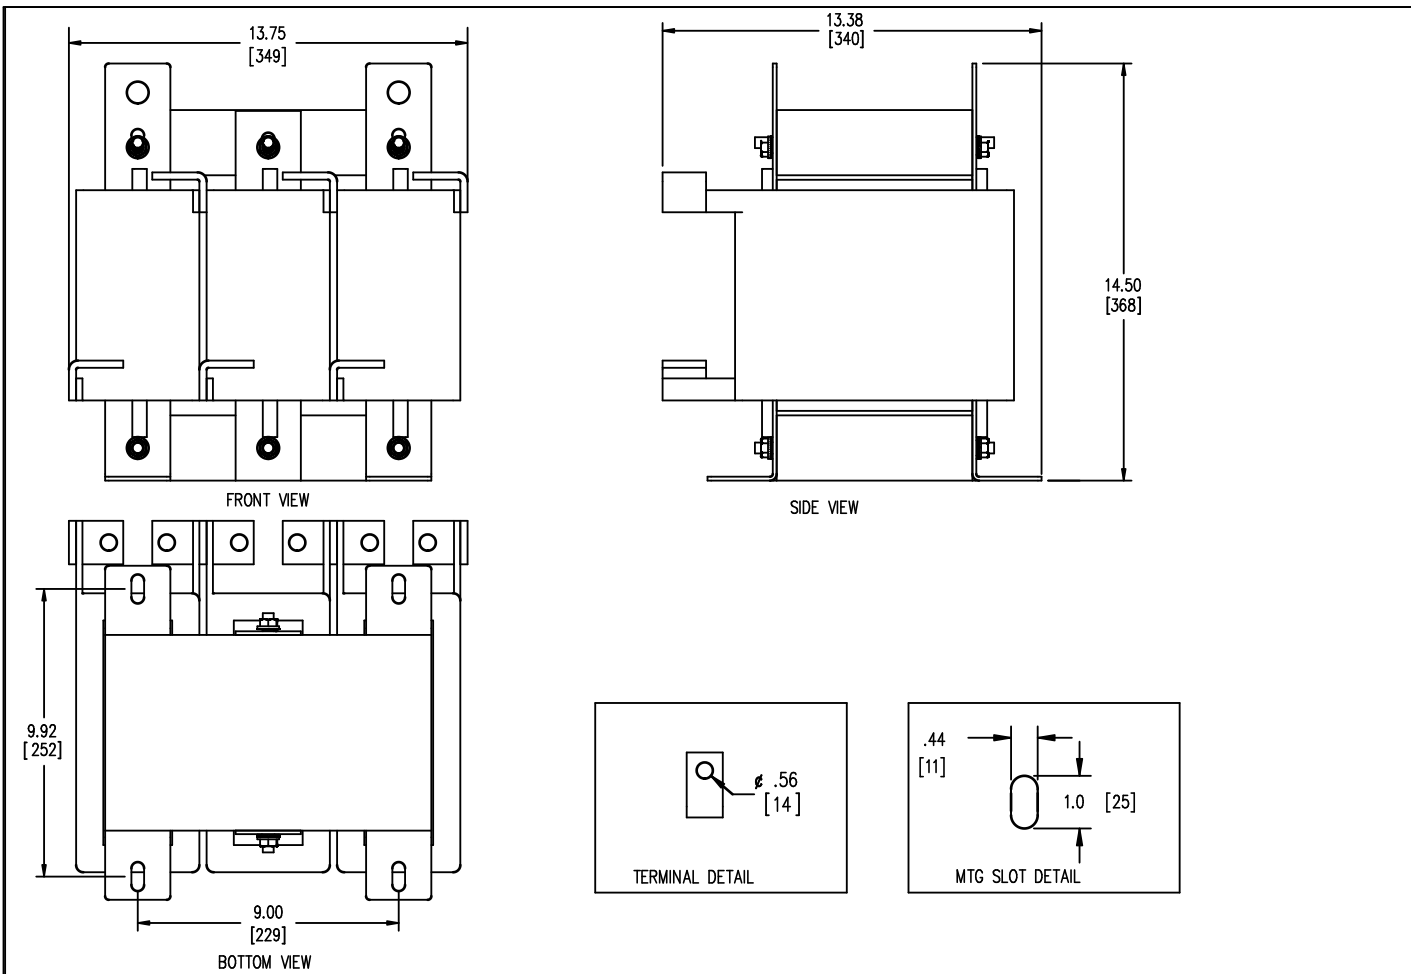

	<p>TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"</p>	<p>THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION</p>	<p>All Dimensions in Inches mm in Parenthesis</p>	<p>REACTOR</p>
--	--	---	---	----------------

**hammond**  
POWER SOLUTIONS

HPS CENTURION R  
3PH DRY TYPE  
REACTOR

P/N CRX0515BC

INDUCT. 0.076 MH 50/60 HZ 515 AMPS

0.6 KV CLASS WT: 220 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-2

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

MADE IN CANADA  
IND. CONT. EQ. E61431  
LISTED

f003782e

NOTES:

		<p>TITLE: PROTOTYPE REACTOR</p>			<p>SHEET 1 OF 1 EDBCRX0515BC</p>
<p>NO.</p>	<p>DATE</p>	<p>BY</p>	<p>REVISION</p>	<p>DES: PBAKER DATE: 14/07/04 SCALE: NTS</p>	