

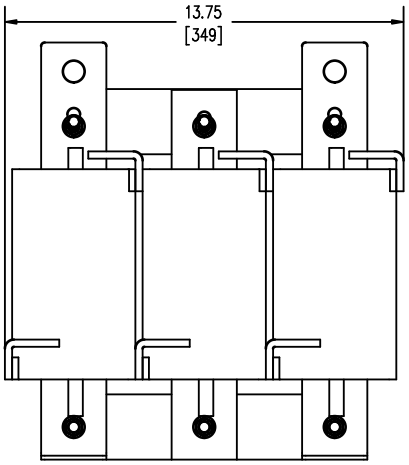



FRONT VIEW

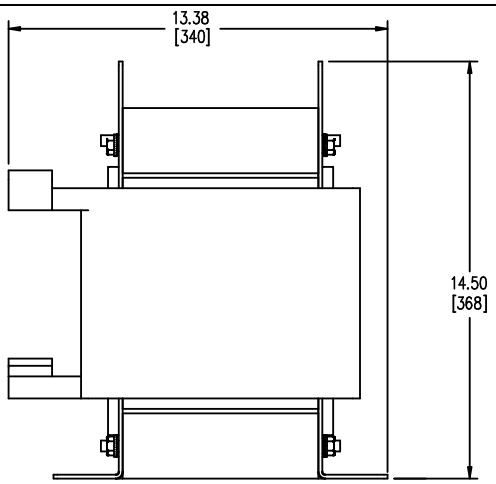


SIDE VIEW

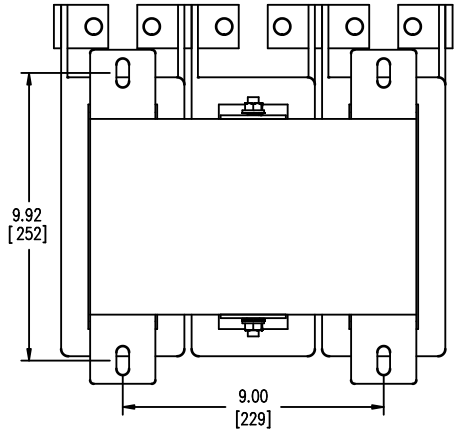

BOTTOM VIEW



TERMINAL DETAIL



MTG SLOT DETAIL

hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/– .06" MOUNTING HOLE SIZE = +/– .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

P/N CRX0590BC

INDUCT. 0.064 MH 50/60 HZ 590 AMPS

0.6 KV CLASS WT: 220 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e

LR3902

IND. CONT. EQ. E61431 LISTED

MADE IN CANADA

NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR PROTOTYPE

NO.	DATE	BY	REVISION

DES: PBAKER

DATE: 14/07/04

SCALE: NTS

SHEET 1 OF 1

EDBCRX0590BC

0.2 httpd 2026/11/05 00:55