


THIS DRAWING CONTAINS STRICKLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

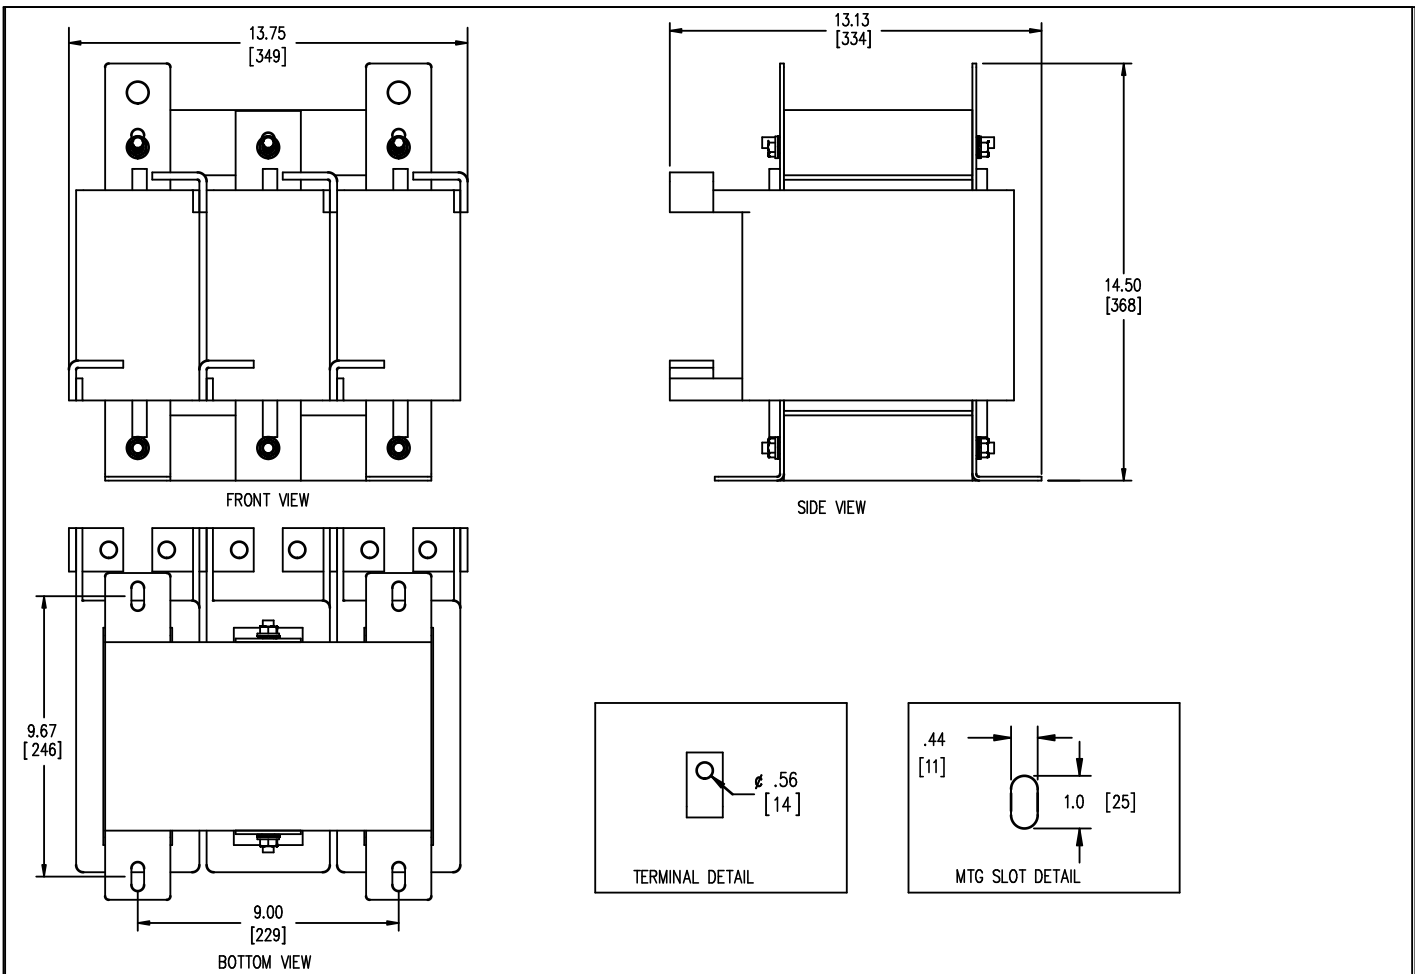

	<p>TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"</p>	<p>THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION</p>	<p>All Dimensions in Inches mm in Parenthesis</p>	<p>REACTOR</p>
--	--	---	---	----------------

hammond
POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

P/N CRX0600EC

INDUCT. .077 MH 50/60 HZ 600 AMPS

0.6 KV CLASS WT: 230 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

MADE IN CANADA
LR3902
IND. CONT. EQ. E61431
LISTED

f003782e

NOTES:

		<p>TITLE: LINE REACTOR</p>			<p>SHEET 1 OF 1 EDBCRX0600EC</p>
NO.	DATE	BY	REVISION	<p>DES: AYU DATE: 15/03/25 SCALE: NTS</p>	