hammond POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

P/N CRX0600EE

INDUCT. .077 MH 50/60 HZ 600 AMPS

0.6 KV CLASS WT: 230 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3A

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e

LR3902

IND. CONT. EQ. E61431

LISTED

MADE IN CANADA

hammond POWER SOLUTIONS

TITLE: LINE REACTOR NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION


DES: PBAKER
DATE: 20/04/14
SCALE: NTS

SHEET 1 OF 2

EDBCRX0600EE

0.2 httpd 2026/11/05 00:41


THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

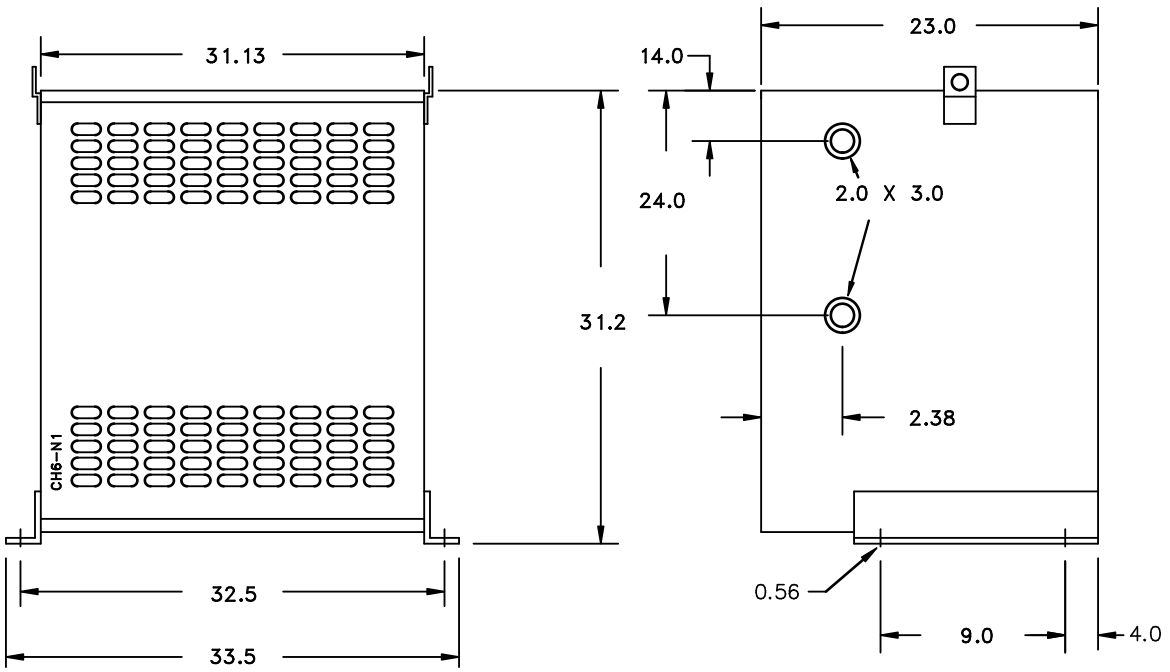

All Dimensions in inches


ENCLOSURE COLOR :ANSI 61 GREY – INDOOR

INPUT TERMINAL DETAIL



MATERIAL: 1/4" THICK CU.

OUTPUT TERMINAL DETAIL



MATERIAL: 1/4" THICK CU.

CUSTOMER NOTES:
- INPUT TERMINATED AT BOTTOM FRONT
- OUTPUT TERMINATED AT TOP FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: LINE REACTOR ENCLOSURE DETAIL

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 20/04/14
SCALE: NTS

SHEET 2 OF 2

EDBCRX0600EE

0.2 httpd 2026/11/05 00:41