





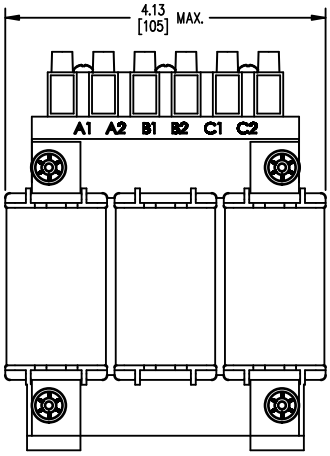

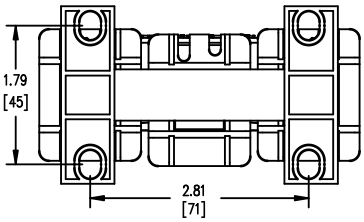

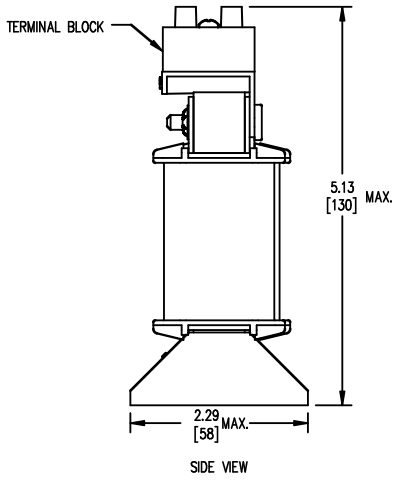

TERMINAL BLOCK SUITABLE FOR #14 TO #18 AWG CONDUCTORS QTY. 1 PER PHASE



LR 3902
E61431
IP00

hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond
POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

CRX06D6CC

2.33MH 50/60 HZ 6.6 AMPS
0.6 KV CLASS TEMP CLASS: 130 TYPE JR-1
TERMINAL TORQUE: 5 LB-IN AMBIENT: 50°C

NOTES:

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond
POWER SOLUTIONS

TITLE: 3 PHASE LINE REACTOR

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 14/06/25
SCALE: NTS

SHEET 1 OF 1

EDBCRX06D6CC

0.0 httpd 2026/11/05 04:06