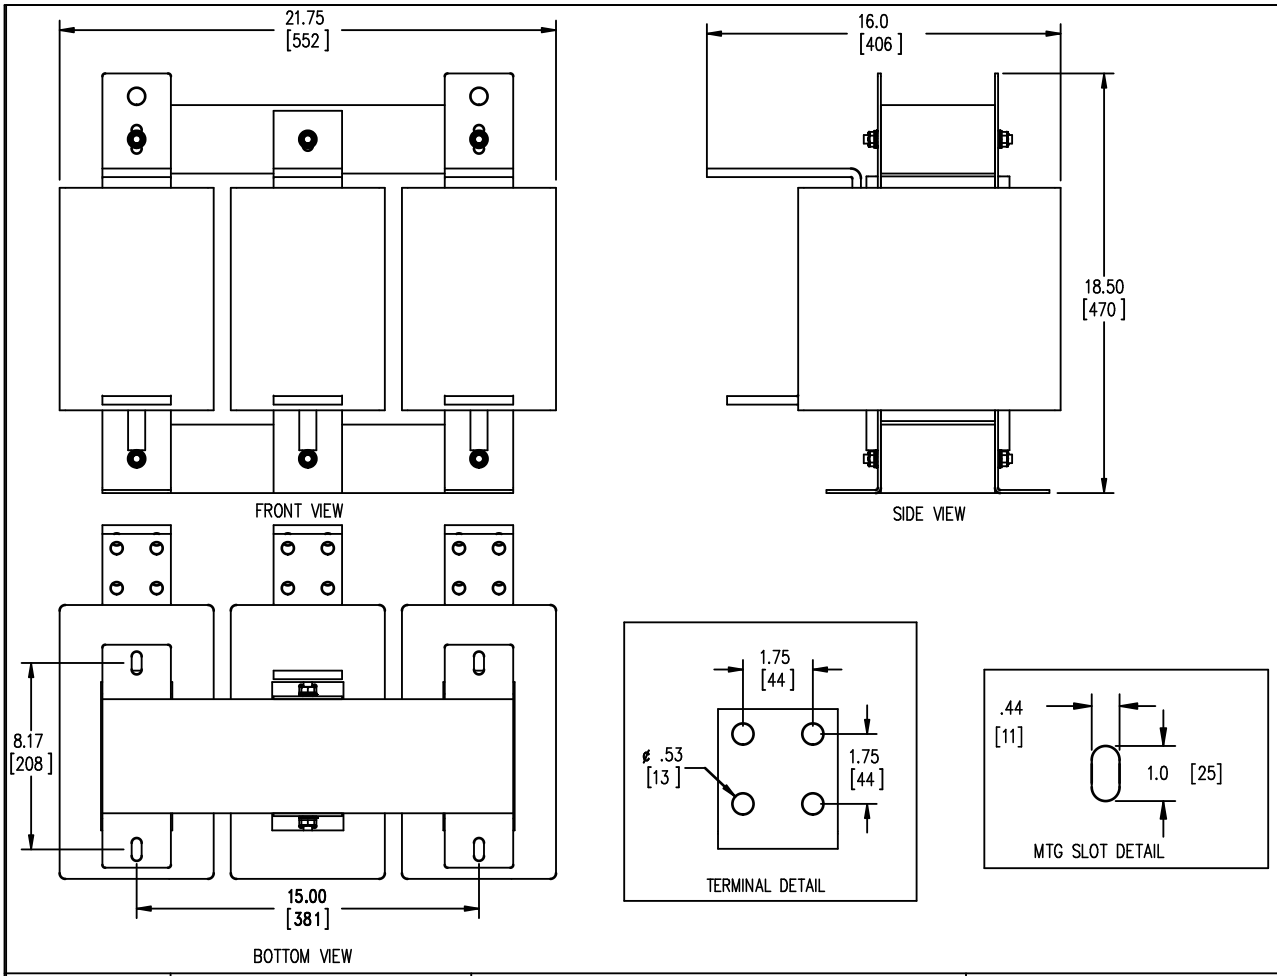


Hammond Power Solutions Inc.	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	REACTOR

hammond
POWER SOLUTIONS

HPS CENTURION R 3PH DRY TYPE REACTOR

P/N CRX1200EC

INDUCT. 0.038 MH 50/60 HZ 1200 AMPS

0.6 KV CLASS WT: 422 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-3

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C

f003782e

LR3902

IND. CONT. EQ. E61431 LISTED

MADE IN CANADA

NOTES:

hammond
POWER SOLUTIONS

TITLE:	IRON CORE LINE REACTOR				
				DES:	AYU
				DATE:	15/03/27
NO.	DATE	BY	REVISION	SCALE:	NTS

SHEET 1 OF 1

EDBCRX1200EC

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.2 httpd 2026/11/05 08:15