

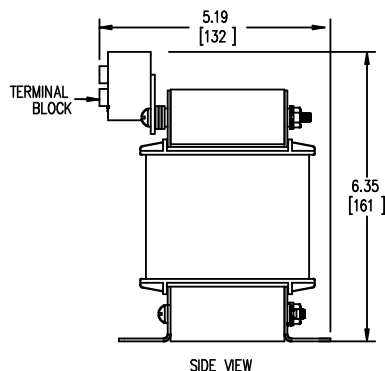


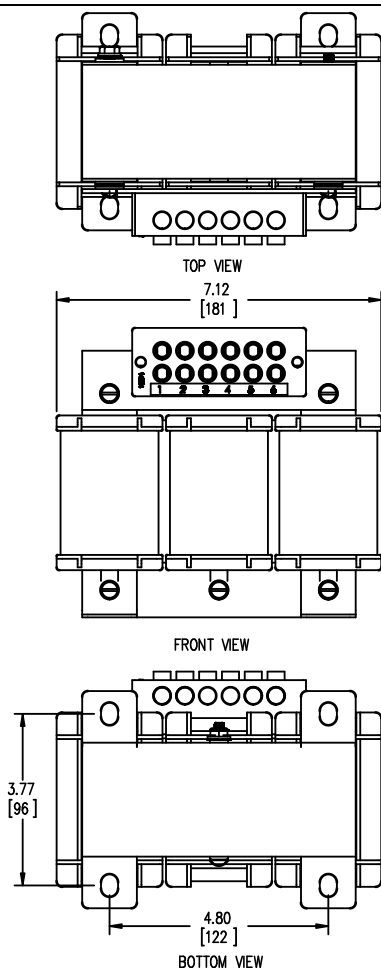

TERMINAL BLOCK
SUITABLE FOR
#14 TO #4 AWG
CONDUCTORS
QTY. 1 PER PHASE



TOLERANCES
MOUNTING CENTERS = $\pm .06"$
MOUNTING HOLE SIZE = $\pm .005"$

THIS DRAWING CONTAINS PROPRIETARY INFORMATION
BELONGING TO HAMMOND POWER SOLUTIONS INC.,
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches
mm in Parenthesis

REACTOR

hammond 
POWER SOLUTIONS

HPS CENTURION R
3PH DRY TYPE
REACTOR

MADE IN CANADA

P/N CRX30D5PC

INDUCT. 1.1mH Hz 50/60 AMPS 30.5IP00

0.6 kV CLASS TEMP CLASS 180°C TYPE JR-1

WEIGHT 21.5 (LBS/KG) AMBIENT: 50°C



f0037760e

NOTES:

┌ A1 A2 B1 B2 C1 C2 ┐

hammond 
POWER SOLUTIONS

TITLE: 3 PHASE LINE REACTOR

DES: PBAKER
DATE: 21/03/01
SCALE: NTS

SHEET 1 OF 1

EDBCRX30D5PC

0.1 httpd 2026/07/22 04:40

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.