

hammond

POWER SOLUTIONS



US LISTED

E61431

GUELPH, ONT BARABOO, WI COMPTON, CA MONTERREY, MX


MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	<input type="text" value="7.5"/>	CUST. REF.	<input type="text"/>
SYS. VOLTAGE	<input type="text" value="480"/>	SERIAL NO.	<input type="text"/>
FREQ. (Hz)	<input type="text" value="90"/>	PART NO.	<input type="text" value="CS1K0012C"/>
CURRENT (AMP)	<input type="text" value="12"/>	TYPE	SR-2 <input type="text" value="ANN"/>
		WDG MATERIAL	<input type="text" value="CU"/>
TEMP. RISE °C	<input type="text" value="115"/>	ENCL. TYPE	<input type="text" value="3R"/>
TEMP. CLASS °C	<input type="text" value="220"/>	WEIGHT lbs/kg	<input type="text" value="70/32"/>

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS
WINDING TERMINAL TEMPERATURE: 75° C

F0677EF

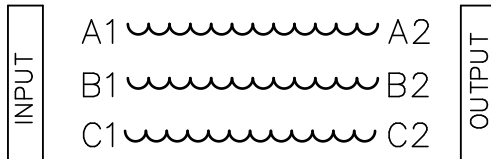

hammond

POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	DES: PBAKER
				DATE: 26/01/07
				SCALE: NTS

SHEET 1 OF 2

EDBCS1K0012C

0.1 htpd 2026/06/25 04:30

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW



SIDE VIEW



All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

INPUT TERMINAL DETAIL

OUTPUT TERMINAL DETAIL

SUITABLE FOR #18-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #18-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- INPUT TERMINATED AT TOP FRONT
- OUTPUT TERMINATED AT TOP FRONT



TITLE: IRON CORE LINE REACTOR
ENCLOSURE & TERMINATION DETAIL

DES:	PBAKER
DATE:	26/01/07
SCALE:	NTS

NO.	DATE	BY	REVISION

SHEET 2 OF 2

EDBCS1K0012C