

hammond

POWER SOLUTIONS



US LISTED

E61431

GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX


MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	<input type="text" value="10"/>	CUST. REF.	<input type="text"/>
SYS. VOLTAGE	<input type="text" value="480"/>	SERIAL NO.	<input type="text"/>
FREQ. (Hz)	<input type="text" value="90"/>	PART NO.	<input type="text" value="CS1K0016C"/>
CURRENT(AMP)	<input type="text" value="16"/>	TYPE	SR-1 <input type="text" value="ANN"/>
		WDG MATERIAL	<input type="text" value="CU"/>
TEMP. RISE °C	<input type="text" value="115"/>	ENCL. TYPE	<input type="text" value="3R"/>
TEMP. CLASS °C	<input type="text" value="220"/>	WEIGHT lbs/kg	<input type="text" value="65/30"/>

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS
WINDING TERMINAL TEMPERATURE: 75° C

F0677EF

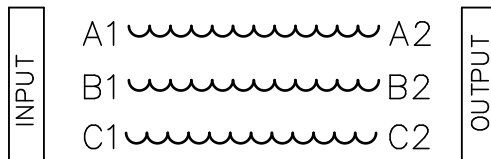

hammond

POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	DES: PBAKER
				DATE: 25/02/21
				SCALE: NTS

SHEET 1 OF 2

EDBCS1K0016C

0.0 httpd 2026/04/03 22:31 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW



SIDE VIEW



All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

INPUT TERMINAL DETAIL

OUTPUT TERMINAL DETAIL

SUITABLE FOR #18-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #18-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- INPUT TERMINATED AT TOP FRONT
- OUTPUT TERMINATED AT TOP FRONT



TITLE: IRON CORE LINE REACTOR
ENCLOSURE & TERMINATION DETAIL

DES:	PBAKER
DATE:	25/02/21
SCALE:	NTS

NO.	DATE	BY	REVISION

SHEET 2 OF 2

EDBCS1K0016C