

hammond
POWER SOLUTIONS



US LISTED

E61431

GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX

MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)

10

CUST. REF.

SYS. VOLTAGE

480

SERIAL NO.

FREQ. (Hz)

90

PART NO.

CS1K0016F

CURRENT(AMP)

16

TYPE SJR-1

AN

WDG MATERIAL

CU

TEMP. RISE °C

115

ENCL. TYPE

TEMP. CLASS °C

220

WEIGHT lbs/kg

24/11

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS
WINDING TERMINAL TEMPERATURE: 75° C

F0677EF

INPUT

A1

A2

B1

B2

C1

C2

OUTPUT

hammond
POWER SOLUTIONS


TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION	DES: PBAKER
				DATE: 23/11/23
				SCALE: NTS


SHEET 1 OF 3

EDBCS1K0016F


0.1 pbaker 2025/03/06 06:17

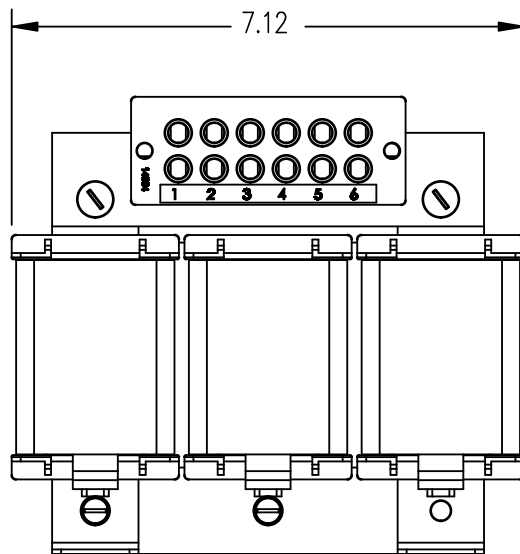


FRONT VIEW

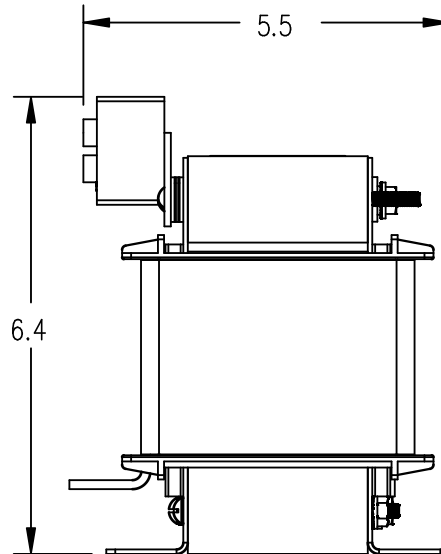

SIDE VIEW

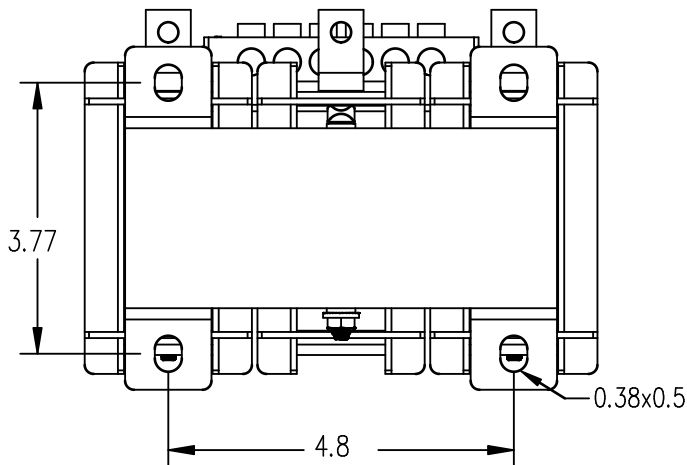

BOTTOM VIEW

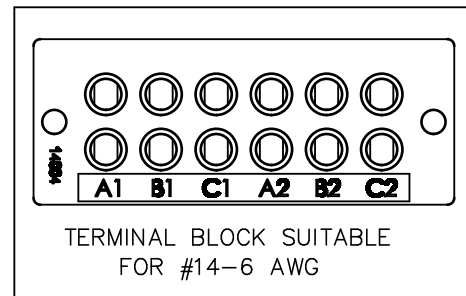

TOLERANCES
MOUNTING CENTERS = +/- .06"
MOUNTING HOLE SIZE = +/- .005"

THIS DRAWING CONTAINS PROPRIETARY INFORMATION
BELONGING TO HAMMOND POWER SOLUTIONS INC.,
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches
mm in Parenthesis

FILTER




TITLE: IRON CORE LINE REACTOR
FLOOR MOUNT

DES: PBAKER
DATE: 23/11/23
SCALE: NTS
NO. DATE BY REVISION


SHEET 2 OF 3

EDBCS1K0016F


0.1 pbaker 2025/03/06 06:17

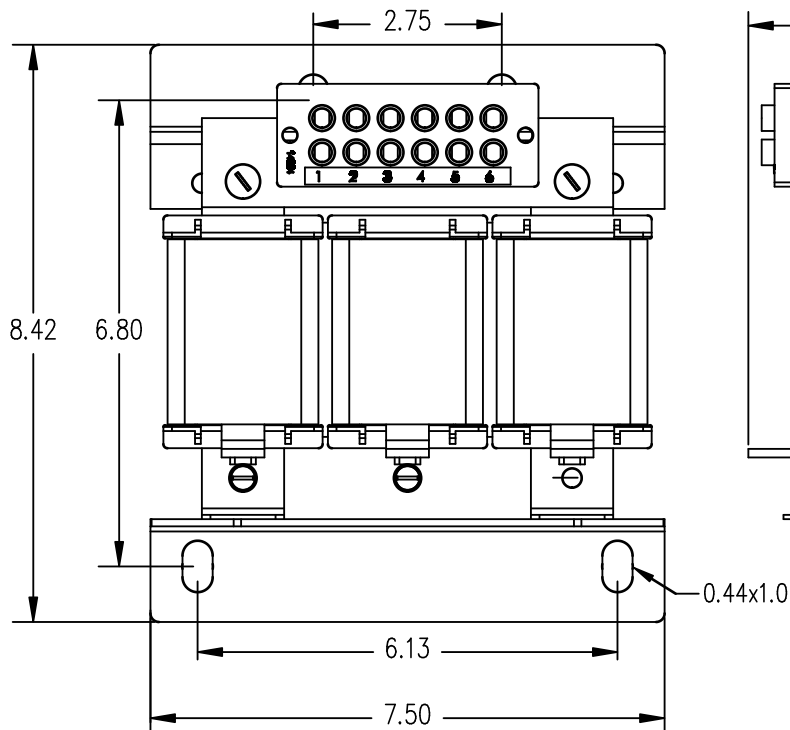

FRONT VIEW

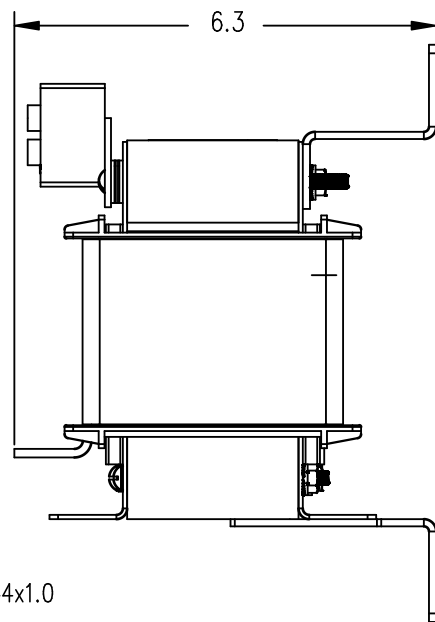

SIDE VIEW

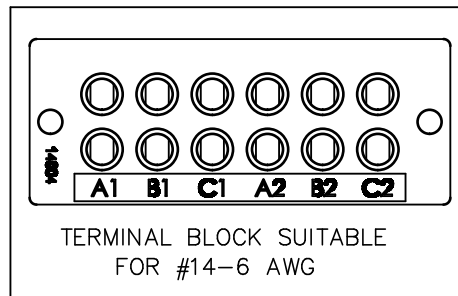

TOLERANCES
MOUNTING CENTERS = $\pm .06"$
MOUNTING HOLE SIZE = $\pm .005"$

THIS DRAWING CONTAINS PROPRIETARY INFORMATION
BELONGING TO HAMMOND POWER SOLUTIONS INC.,
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches
mm in Parenthesis

FILTER

hammond
POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
WALL MOUNT

				DES: PBAKER
				DATE: 23/11/23
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 3 OF 3

EDBCS1K0016F

0.1 pbaker 2025/03/06 06:17