hammond POWER SOLUTIONS

c UL US LISTED
E61431


GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX

MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	450	CUST. REF.	
SYS. VOLTAGE	480	SERIAL NO.	
FREQ. (Hz)	90	PART NO.	CS1K0515F
CURRENT(AMP)	515	TYPE SJR–4	AN
		WDG MATERIAL	CU
TEMP. RISE °C	130	ENCL. TYPE	
TEMP. CLASS °C	220	WEIGHT lbs/kg	350/159

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS
WINDING TERMINAL TEMPERATURE: 75° C

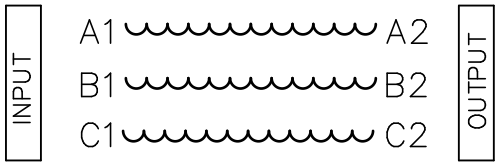

F0677EF

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS


TITLE: LINE REACTOR
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION


DES: MVAGHANI
DATE: 26/03/11
SCALE: NTS

SHEET 1 OF 5


EDBCS1K0515F

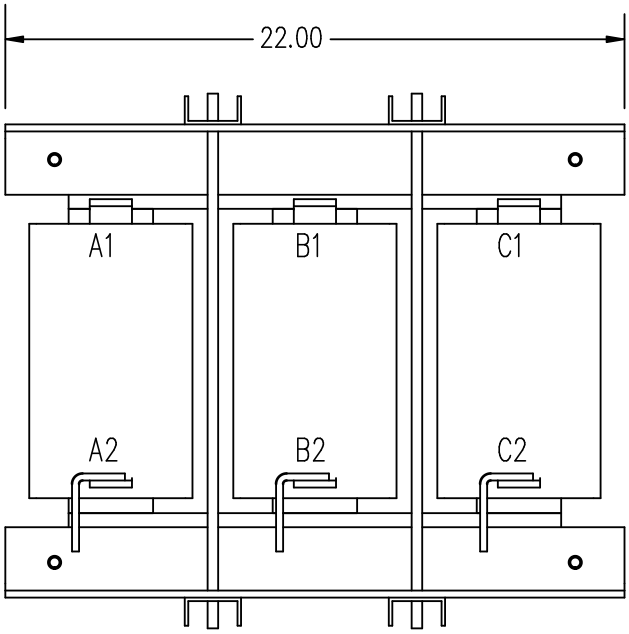


FRONT VIEW

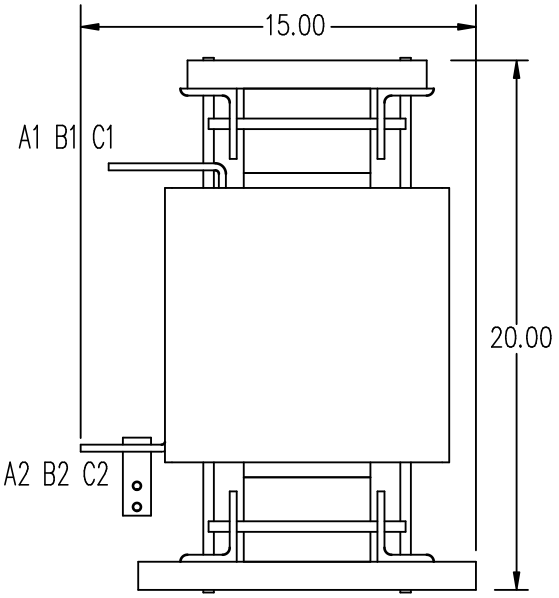

SIDE VIEW

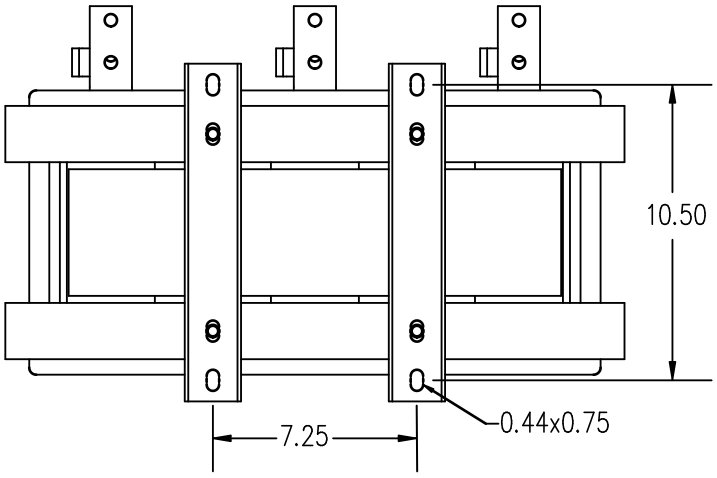

BOTTOM VIEW



hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	FILTER

hammond POWER SOLUTIONS

TITLE: LINE REACTOR
FLOOR MOUNT DIMENSIONS

NO.	DATE	BY	REVISION

DES: MVAGHANI
DATE: 26/03/11
SCALE: NTS


SHEET 2 OF 5


EDBCS1K0515F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.4 httpd 2026/11/05 01:30

CPT06001

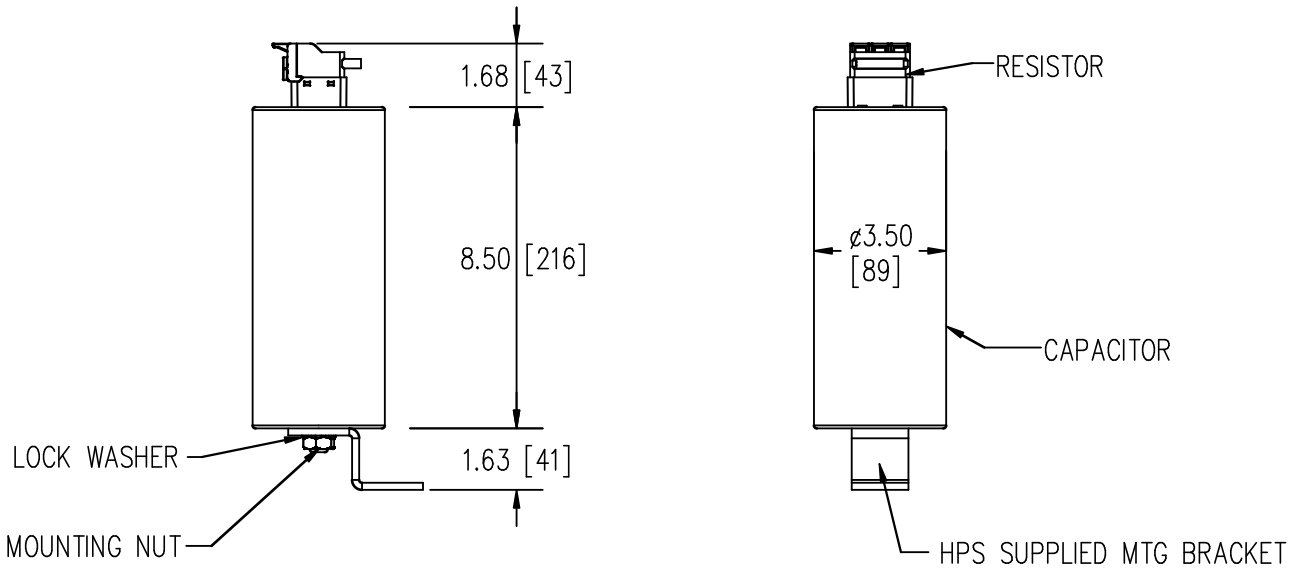

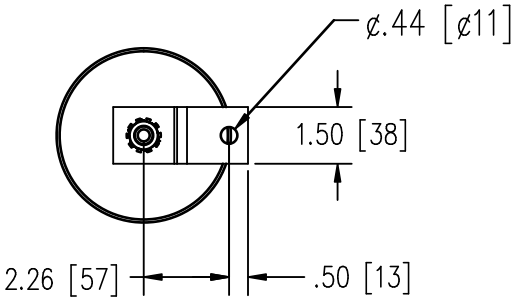

- ENSURE CAPACITOR BLEEDER RESISTOR IS INSTALLED IN CAPACITOR TERMINAL BLOCK.
- BLEEDER RESISTOR MAY BE SUPPLIED LOOSE WITH THE CAPACITOR.
- USE MIN # 14 AWG CONDUCTORS TO CONNECT TO FILTER.
- USE WIRE RATED FOR AT LEAST 90°C AND SIZED BASIS OF 75° AMPACITY.

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.4 httpd 2026/11/05 01:30

hammond POWER SOLUTIONS


TITLE: LINE REACTOR
CAPACITOR DIMENSIONS
(1 CAPACITOR REQUIRED)


NO.	DATE	BY	REVISION

DES: MVAGHANI
DATE: 26/03/11
SCALE: NTS

EDBCS1K0515F

CPT06033

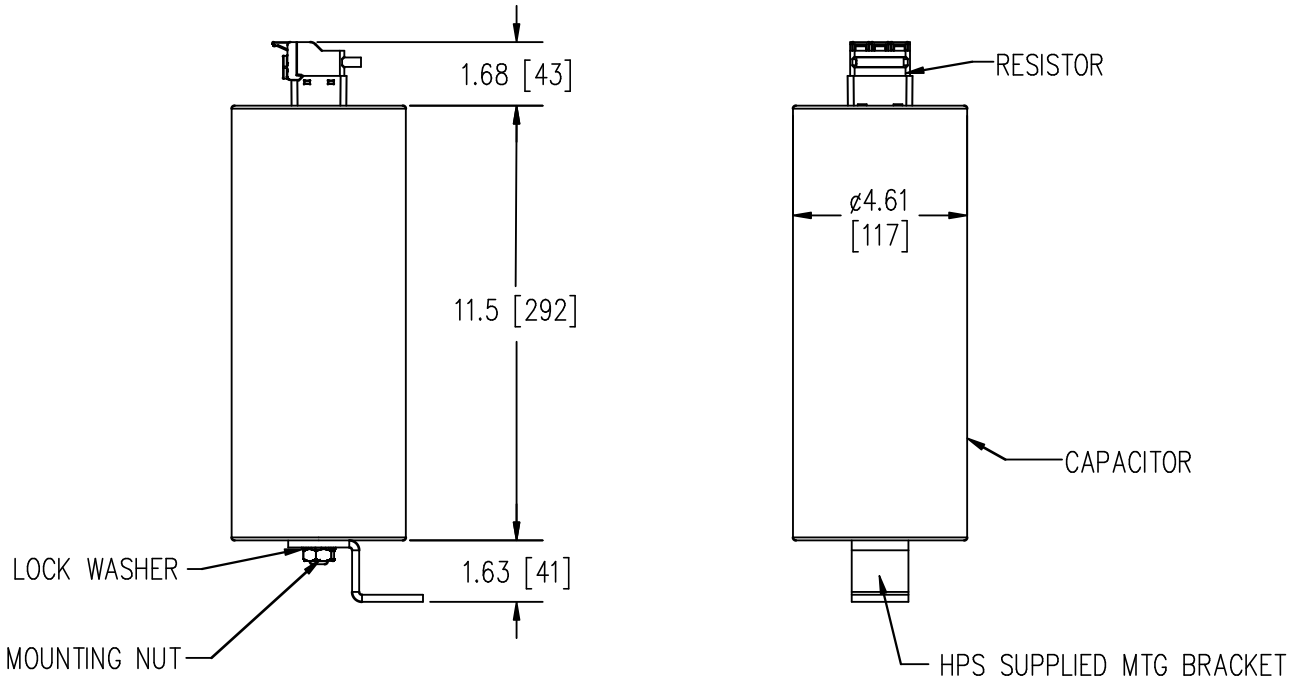

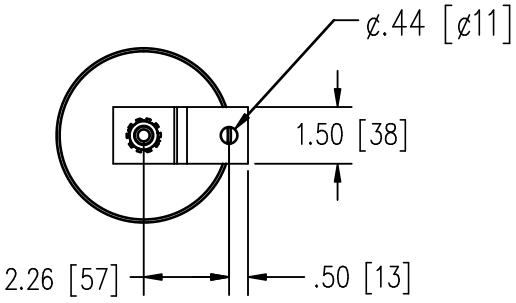

- ENSURE CAPACITOR BLEEDER RESISTOR IS INSTALLED IN CAPACITOR TERMINAL BLOCK.
- BLEEDER RESISTOR MAY BE SUPPLIED LOOSE WITH THE CAPACITOR.
- USE MIN # 8 AWG CONDUCTORS TO CONNECT TO FILTER.
- USE WIRE RATED FOR AT LEAST 90°C AND SIZED BASIS OF 75° AMPACITY.

hammond POWER SOLUTIONS

TITLE: LINE REACTOR
CAPACITOR DIMENSIONS
(3 CAPACITOR REQUIRED)

NO.	DATE	BY	REVISION

DES: MVAGHANI
DATE: 26/03/11
SCALE: NTS

SHEET 4 OF 5

EDBCS1K0515F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.4 httpd 2026/11/05 01:30

hammond
POWER SOLUTIONS

TITLE: LINE REACTOR
CAPACITOR WIRING

NO.	DATE	BY	REVISION

DES: MVAGHANI
DATE: 26/03/11
SCALE: NTS

SHEET 5 OF 5

EDBCS1K0515F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.4 httpd 2026/11/05 01:30