hammond POWER SOLUTIONS

c UL US LISTED
E61431


GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX

MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	500	CUST. REF.	
SYS. VOLTAGE	480	SERIAL NO.	
FREQ. (Hz)	90	PART NO.	CS1K0600F
CURRENT(AMP)	600	TYPE SJR–4	AN
		WDG MATERIAL	CU
TEMP. RISE °C	130	ENCL. TYPE	
TEMP. CLASS °C	220	WEIGHT lbs/kg	500/227

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS
WINDING TERMINAL TEMPERATURE: 75° C

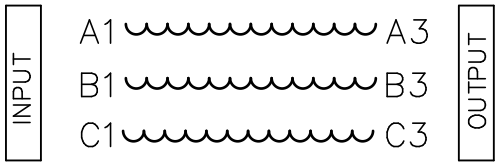

F0677EF

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.5 httpd 2026/11/05 02:12

hammond POWER SOLUTIONS


TITLE: SINE WAVE FILTER REACTOR NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 23/11/14
SCALE: NTS


SHEET 1 OF 5

EDBCS1K0600F

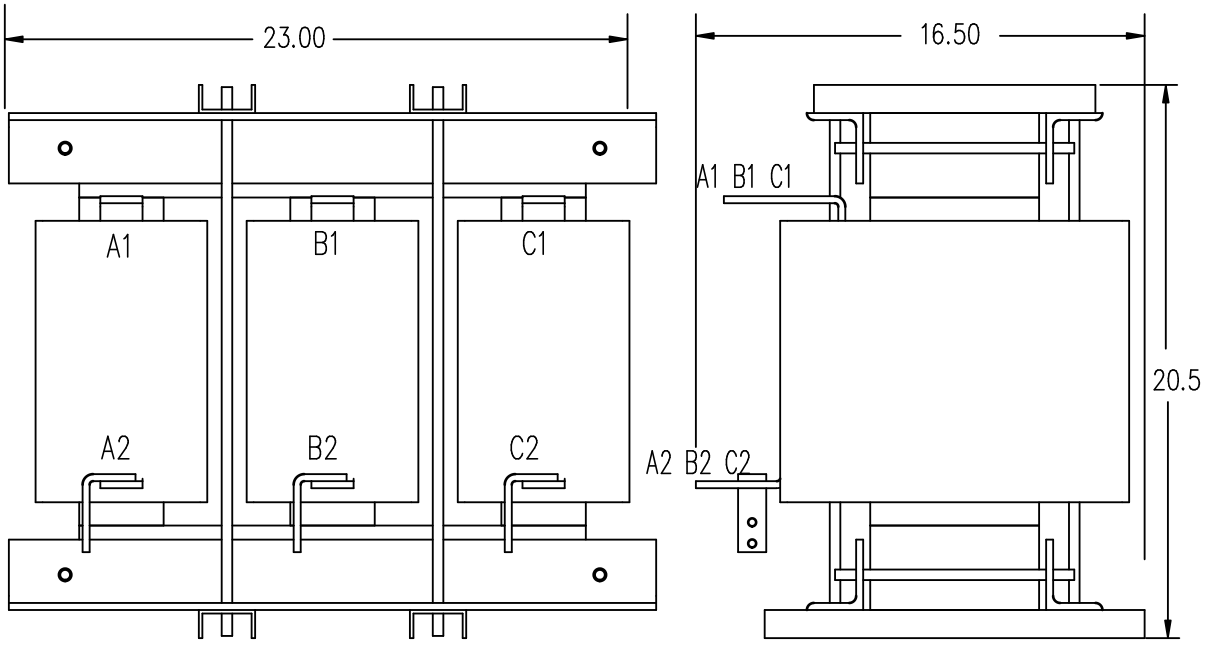


FRONT VIEW

SIDE VIEW

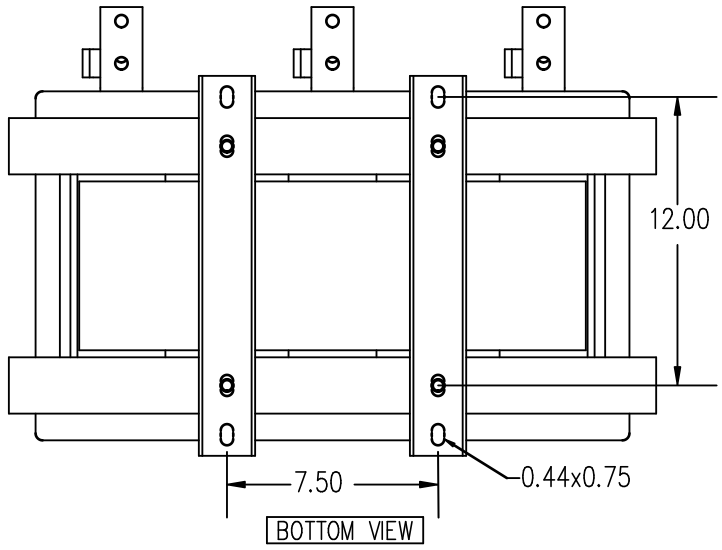

BOTTOM VIEW



TERMINAL DETAIL

hammond POWER SOLUTIONS	TOLERANCES MOUNTING CENTERS = +/- .06" MOUNTING HOLE SIZE = +/- .005"	THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS INC., AND IS NOT FOR GENERAL DISTRIBUTION	All Dimensions in Inches mm in Parenthesis	FILTER

hammond POWER SOLUTIONS

TITLE: SINE WAVE FILTER REACTOR
FLOOR MOUNT DIMENSIONS

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 23/11/14
SCALE: NTS


SHEET 2 OF 5


EDBCS1K060F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.5 httpd 2026/11/05 02:12

CPT06033

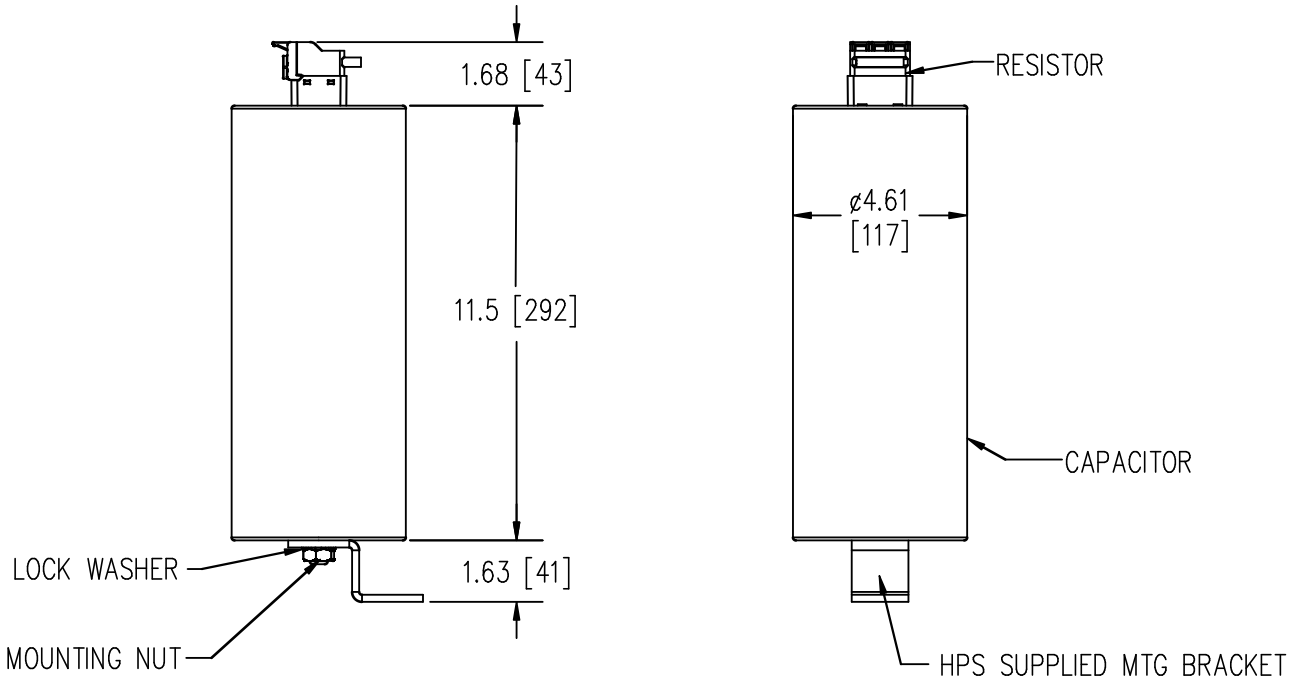

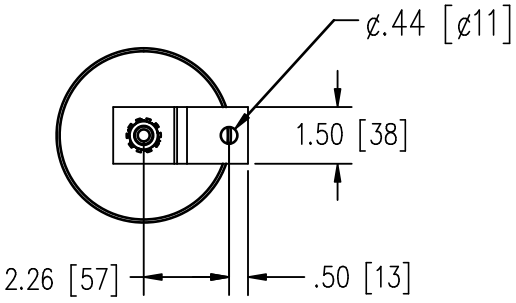

- ENSURE CAPACITOR BLEEDER RESISTOR IS INSTALLED IN CAPACITOR TERMINAL BLOCK.
- BLEEDER RESISTOR MAY BE SUPPLIED LOOSE WITH THE CAPACITOR.
- USE MIN # 8 AWG CONDUCTORS TO CONNECT TO FILTER.
- USE WIRE RATED FOR AT LEAST 90°C AND SIZED BASIS OF 75° AMPACITY.

hammond POWER SOLUTIONS

TITLE: SINE WAVE FILTER REACTOR
CAPACITOR DIMENSIONS
(3 CAPACITOR REQUIRED)

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 23/11/14
SCALE: NTS


SHEET 3 OF 5


EDBCS1K060F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.5 httpd 2026/11/05 02:12

CPT06006

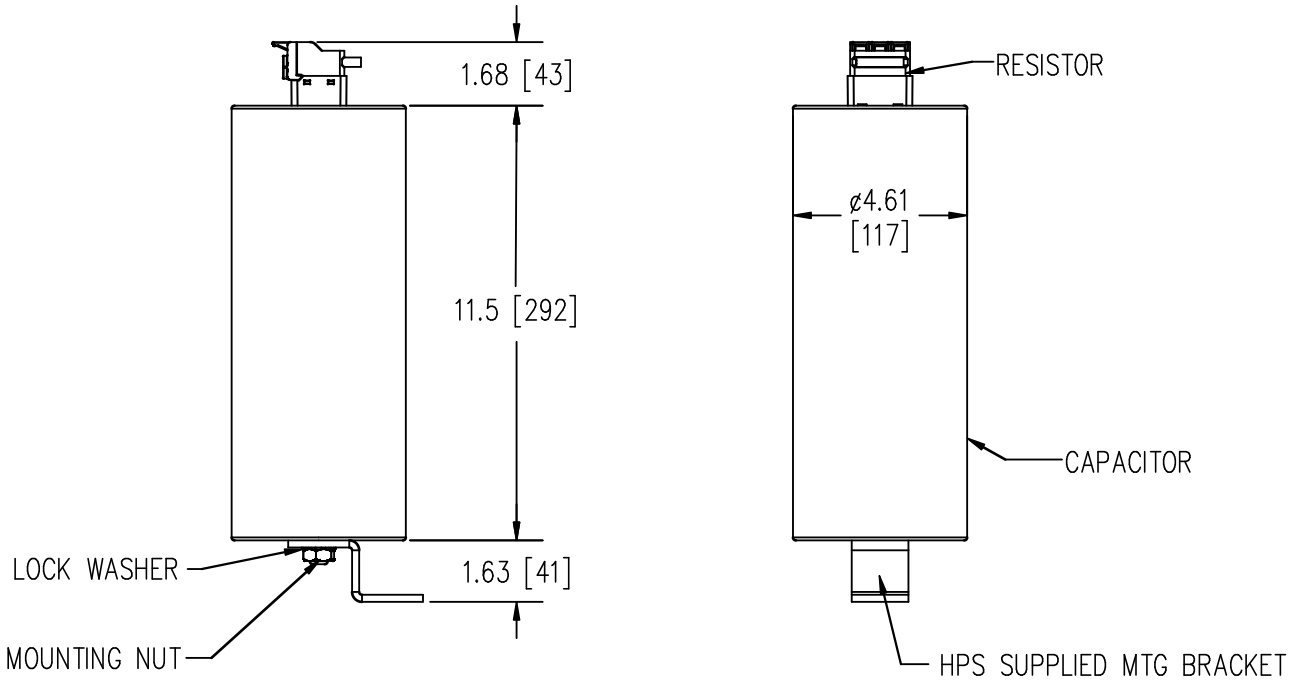

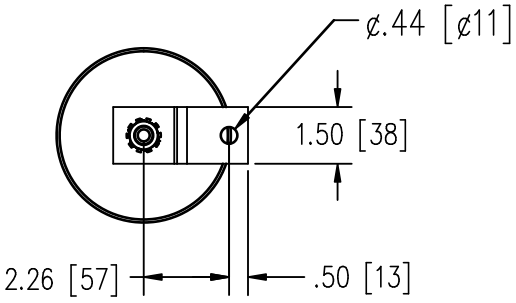

- ENSURE CAPACITOR BLEEDER RESISTOR IS INSTALLED IN CAPACITOR TERMINAL BLOCK.
- BLEEDER RESISTOR MAY BE SUPPLIED LOOSE WITH THE CAPACITOR.
- USE MIN # 8 AWG CONDUCTORS TO CONNECT TO FILTER.
- USE WIRE RATED FOR AT LEAST 90°C AND SIZED BASIS OF 75° AMPACITY.

hammond POWER SOLUTIONS

TITLE: SINE WAVE FILTER REACTOR
CAPACITOR DIMENSIONS
(1 CAPACITOR REQUIRED)

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 23/11/14
SCALE: NTS

SHEET 4 OF 5

EDBCS1K060F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.5 httpd 2026/11/05 02:12

hammond
POWER SOLUTIONS

TITLE: SINE WAVE FILTER REACTOR
CAPACITOR WIRING

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 23/11/14
SCALE: NTS

SHEET 5 OF 5

EDBCS1K060F

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.5 httpd 2026/11/05 02:12