hammond POWER SOLUTIONS

c UL us LISTED
E61431


GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX

MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	5	CUST. REF.	
SYS. VOLTAGE	600	SERIAL NO.	
FREQ. (Hz)	90	PART NO.	CS1P0007C
CURRENT(AMP)	7	TYPE SR–1	ANN
		WDG MATERIAL	CU
TEMP. RISE °C	115	ENCL. TYPE	3R
TEMP. CLASS °C	180	WEIGHT lbs/kg	70/32

WARNING: CAPACITOR VOLTAGE ABOVE 50V MAY REMAIN FOR 180 SECONDS AFTER POWER IS DISCONNECTED.

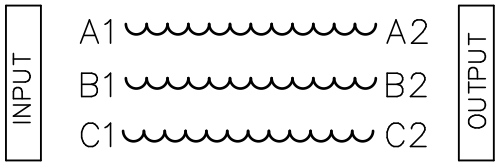

F0677EF

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.1 httpd 2026/11/05 20:12

hammond POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION


NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 24/04/11
SCALE: NTS


SHEET 1 OF 2

EDBCS1P0007C

FRONT VIEW

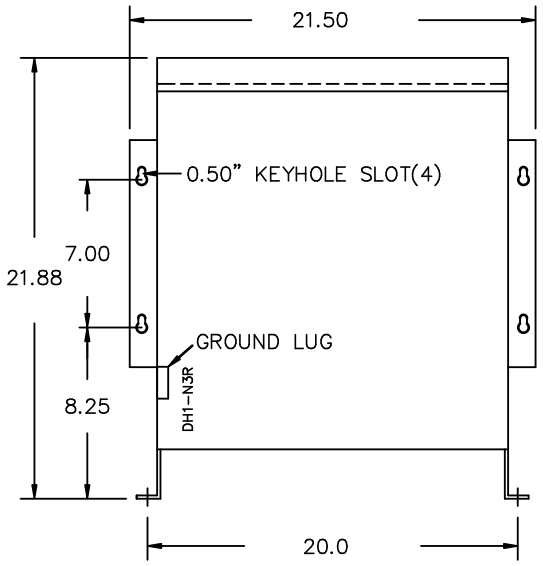

SIDE VIEW

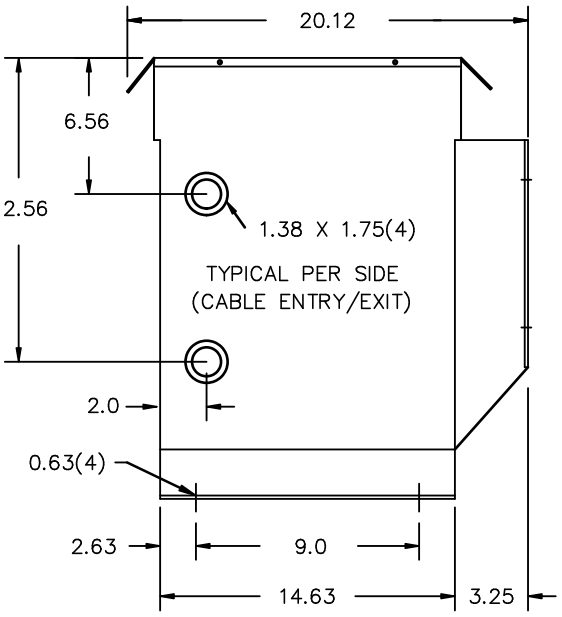

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

INPUT TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

OUTPUT TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- INPUT TERMINATED AT TOP FRONT
- OUTPUT TERMINATED AT TOP FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
ENCLOSURE & TERMINATION DETAIL

NO.	DATE	BY	REVISION

DES: PBAKER
DATE: 24/04/11
SCALE: NTS

SHEET 2 OF 2

EDBCS1P0007C

0.1 httpd 2026/11/05 20:12