

hammond
POWER SOLUTIONS



US LISTED

E61431

GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX


MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)	<input type="text" value="10"/>	CUST. REF.	<input type="text"/>
SYS. VOLTAGE	<input type="text" value="600"/>	SERIAL NO.	<input type="text"/>
FREQ. (Hz)	<input type="text" value="90"/>	PART NO.	<input type="text" value="CS1P0012C"/>
CURRENT(AMP)	<input type="text" value="12"/>	TYPE SR-1	<input type="text" value="ANN"/>
		WDG MATERIAL	<input type="text" value="CU"/>
TEMP. RISE °C	<input type="text" value="115"/>	ENCL. TYPE	<input type="text" value="3R"/>
TEMP. CLASS °C	<input type="text" value="180"/>	WEIGHT lbs/kg	<input type="text" value="50/23"/>

WARNING: CAPACITOR VOLTAGE ABOVE 50V MAY REMAIN FOR 180 SECONDS AFTER POWER IS DISCONNECTED.

F0677EF

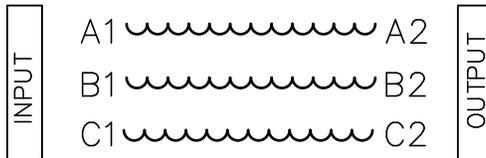

hammond
POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION

1	24/07/25	PB	CORRECTED AMPS	DES: PBAKER
				DATE: 24/04/11
NO.	DATE	BY	REVISION	SCALE: NTS


SHEET 1 OF 2

EDBCS1P0012C


1.0 htpd 2026/04/01 09:09

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

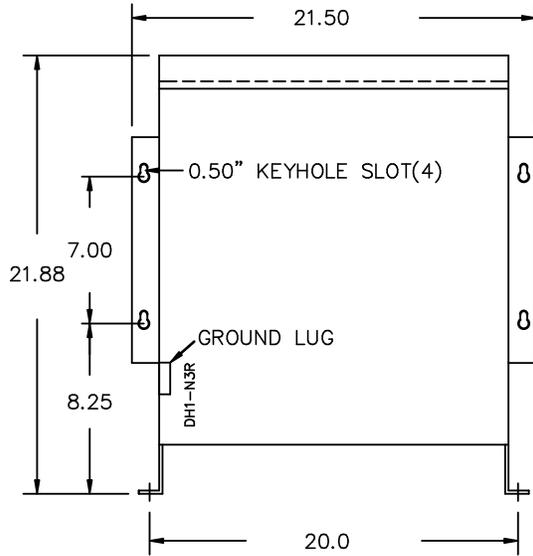

SIDE VIEW

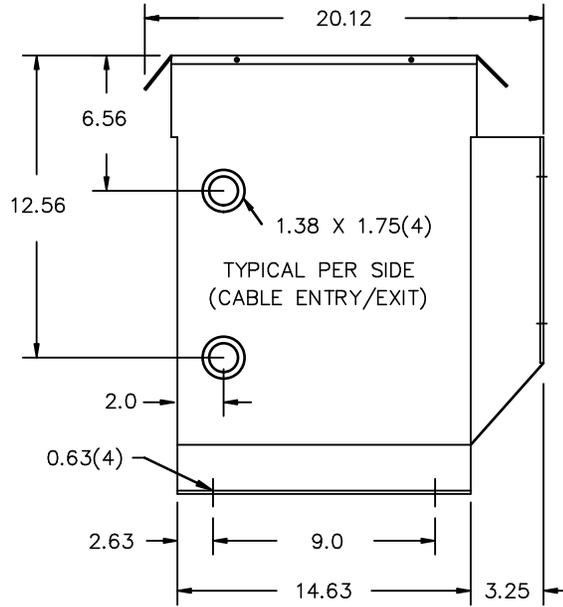

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

INPUT TERMINAL DETAIL

OUTPUT TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- INPUT TERMINATED AT TOP FRONT
- OUTPUT TERMINATED AT TOP FRONT



TITLE: IRON CORE LINE REACTOR
ENCLOSURE & TERMINATION DETAIL

1	24/07/25	PB	CORRECTED AMPS	DES: PBAKER
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBCS1P0012C