

hammond
POWER SOLUTIONS



US LISTED

E61431

GUELPH,ONT BARABOO,WI COMPTON,CA MONTERREY,MX

MADE IN CANADA

HPS Centurion S – 3 Phase SineWave Filter

RATING (HP)

25

CUST. REF.

SYS. VOLTAGE

600

SERIAL NO.

FREQ. (Hz)

90

PART NO.

CS1P0027C

CURRENT(AMP)

27

TYPE

SR-2

ANN

WDG MATERIAL

CU

TEMP. RISE °C

115

ENCL. TYPE

3R

TEMP. CLASS °C

220

WEIGHT lbs

96

WARNING: CAPACITOR VOLTAGE ABOVE 50V MAY REMAIN
FOR 180 SECONDS AFTER POWER IS DISCONNECTED.

F0677EF

INPUT

A1 ~~~~~ A2
B1 ~~~~~ B2
C1 ~~~~~ C2

OUTPUT

hammond
POWER SOLUTIONS

TITLE: IRON CORE LINE REACTOR
NAMEPLATE INFORMATION


				DES: MVAGHANI
				DATE: 26/05/22
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBCS1P0027C

0.0 httpd 2026/07/22 00:14

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

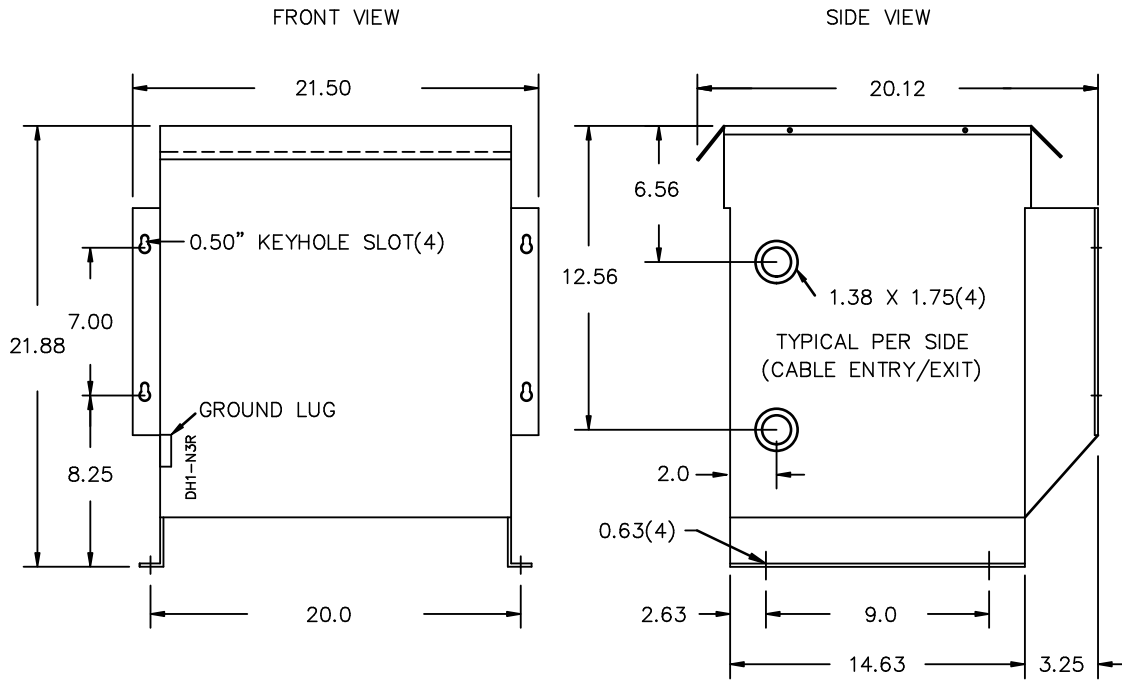

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR

INPUT TERMINAL DETAIL

OUTPUT TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- INPUT TERMINATED AT TOP FRONT
- OUTPUT TERMINATED AT TOP FRONT



TITLE: IRON CORE LINE REACTOR
ENCLOSURE & TERMINATION DETAIL

				DES: MVAGHANI
				DATE: 26/05/22
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBCS1P0027C

0.0 httpd 2026/07/22 00:14

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.