



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480Y/277V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H0 H1 H2 H3				Part No. No. de pièce	DM011BK
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	11
	218 208 198	29.1 30.5 32.1	105 100 95	1-2 2-3 3-4	TYPE	K
	208V				Cooling Refroidissement	ANN
LV/BT					Temp. Rise Echauffement	150 °C
BIL	-				Temp. Class Classe de Temp.	220 °C
TERM. BORNES	X1 X2 X3				Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	4.9
					Encl. Type Type de boîtier	3R
					Wt Poids	165 lbs
					Winding Enroulement	AL

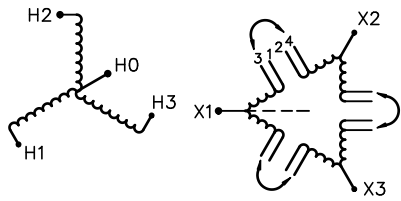

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES
TRANSFORMER SUITABLE FOR STEP UP OPERATION ONLY


4003102b



TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION				
2	21/07/13	PP	EDB UPDATE	DES: MBURSAC
1	16/04/19	MA	HCN: 62971	DATE: 03/09/02
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2
EDBDM011BK

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.
2.0 httpd 2026/06/13 21:23

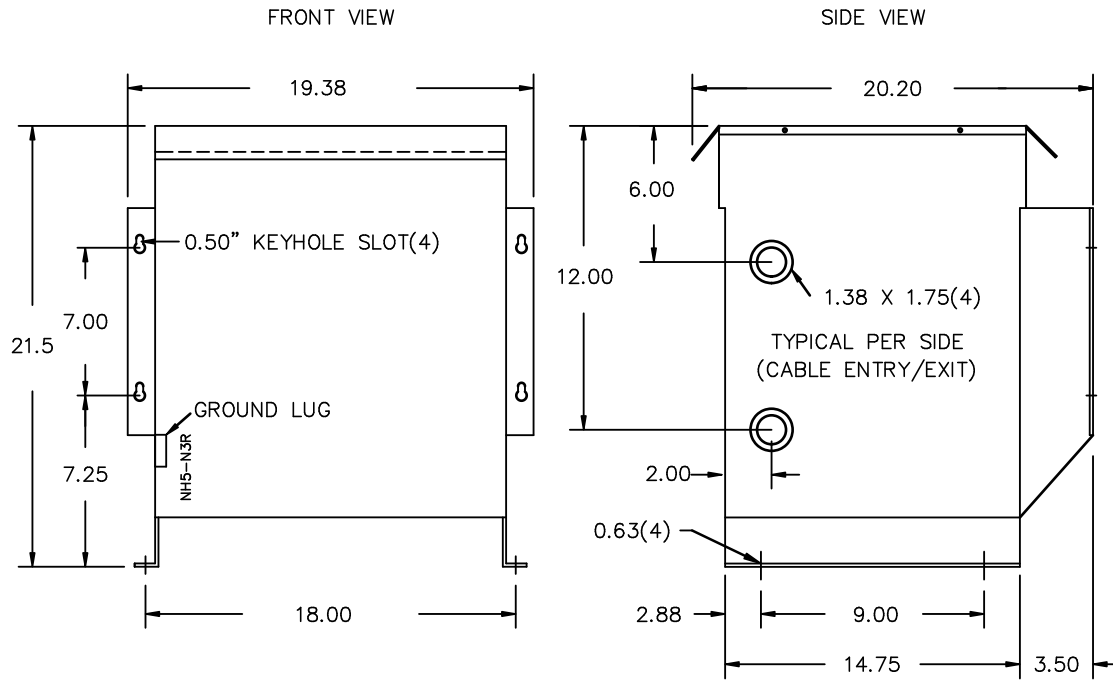

All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT BOTTOM FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

2	21/07/13	PP	EDB UPDATE	DES: MBURSAC
1	16/04/19	MA	HCN: 62971	DATE: 03/09/02
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM011BK