




LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM011NJCN
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	11
	604 575 546	10.5 11.0 11.6	105 100 95	1-2 2-3 3-4	TYPE	K
	460Y/266V				Cooling Refroidissement	ANN
LV/BT					Temp. Rise Echauffement	130 °C
BIL	-				Temp. Class Classe de Temp.	200 °C
TERM. BORNES	X0 X1 X2 X3				Frequency Fréquence	60 Hz
					Impédance % @ 150 °C	4.3
					Encl. Type Type de boîtier	3R
					Wt Poids	185 lbs
					Winding Enroulement	CU

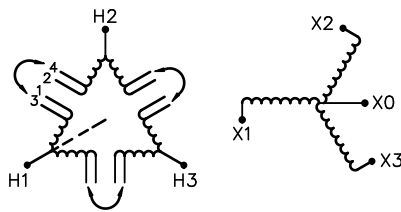

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES

d003102b



TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION					
3	21/07/16	PP	EDB UPDATE	DES:	LCEN
2	17/08/31	MA	HCN: 66353	DATE:	15/09/24
NO.	DATE	BY	REVISION	SCALE:	NTS

SHEET 1 OF 2
 EDBDM011NJCN

3.0 httpd 2026/05/28 12:49 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW



SIDE VIEW



All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT BOTTOM FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

3	21/07/16	PP	EDB UPDATE	DES: LCEN
2	17/08/31	MA	HCN: 66353	DATE: 15/09/24
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM011NJCN