



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM011NNCN
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	11
	604 575 546	10.5 11.0 11.6	105 100 95	1-2 2-3 3-4	TYPE	K
	575Y/332V				Cooling Refroidissement	ANN
LV/BT	575Y/332V				Temp. Rise Echauffement	130 °C
BIL	-				Temp. Class Classe de Temp.	200 °C
TERM. BORNES	X0 X1 X2 X3				Frequency Fréquence	60 Hz
					Impédance % @ 150 °C	3.4
					Encl. Type Type de boîtier	3R
					Wt Poids	190 lbs
					Winding Enroulement	CU

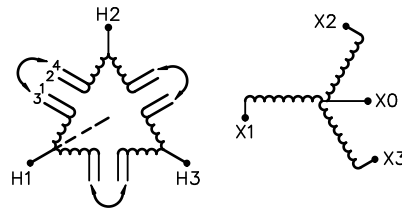

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES

4003102b



TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

4	21/07/16	PP	EDB UPDATE	DES: MBURSAC
3	18/05/28	DC	CHANGED ENCL. TYPE TO 3R ONLY(HCN:68188)	DATE: 03/10/14
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM011NNCN

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.  
4.0 httpd 2026/06/24 22:41

FRONT VIEW



SIDE VIEW



All Dimensions in inches

ENCLOSURE COLOR : ANSI-61 GREY PAINT OUTDOOR.

HV TERMINAL DETAIL

LV TERMINAL DETAIL

SUITABLE FOR #14-4 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

SUITABLE FOR #14-4 CU/AL  
CONDUCTORS  
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT BOTTOM FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

4	21/07/16	PP	EDB UPDATE	DES: MBURSAC
3	18/05/28	DC	CHANGED ENCL. TYPE TO 3R ONLY(HCN:68188)	DATE: 03/10/14
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM011NINC