



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313


LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM027JC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	27
	483 460 437	32.3 33.9 35.7	105 100 95	1 2 3	TYPE	K
	230Y/133V				LV/BT	
	-				BIL	
TERM. BORNES	X0 X1 X2 X3				Wt Poids	280 lbs
					Winding Enroulement	AL

Cooling Refroidissement	ANN
Temp. Rise Echauffement	150 °C
Temp. Class Classe de Temp.	220 °C
Frequency Fréquence	60 Hz
Impédance % @ 170 °C	5.9
Encl. Type Type de boîtier	3R

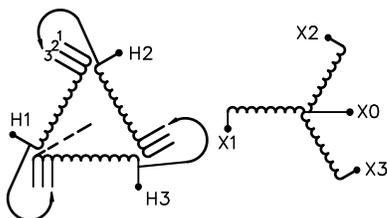

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b




TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION

7	21/07/16	PP	EDB UPDATE	DES: CSUBRT
6	19/12/17	CS	CROSS TO KD	DATE: 99/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM027JC

7.0 httpd 2026/06/03 09:11 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

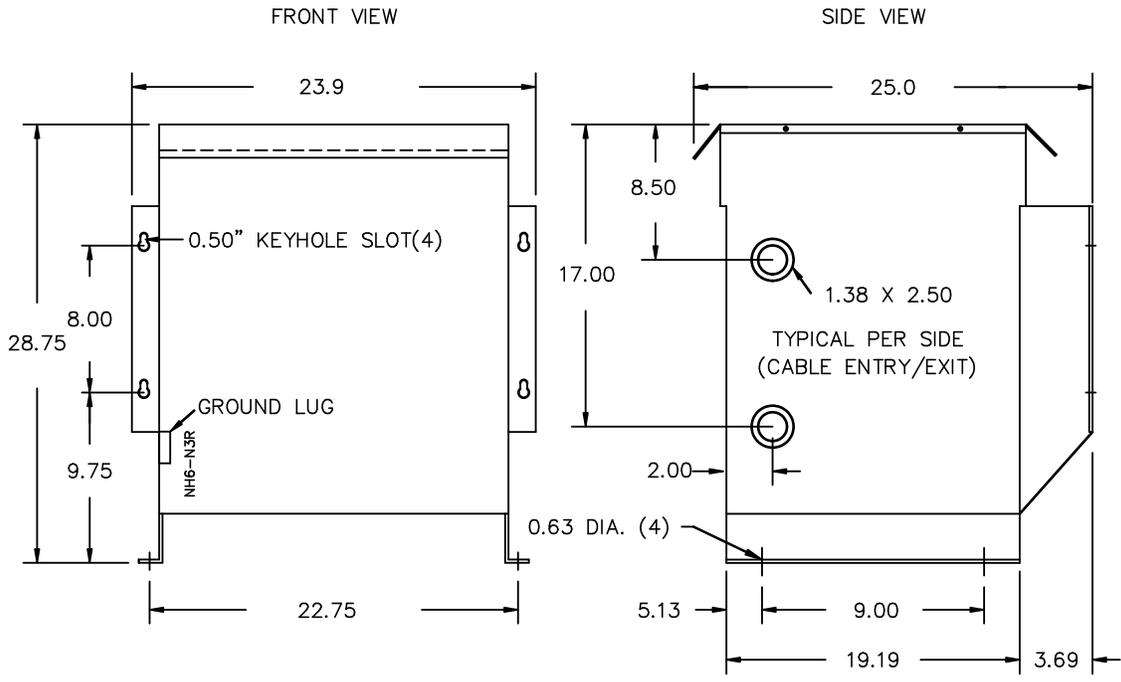

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

7	21/07/16	PP	EDB UPDATE	DES: CSUBRT
6	19/12/17	CS	CROSS TO KD	DATE: 99/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM027JC