



® LR 3902


UL DRY TYPE TRANSFORMER 7745 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM040NJCN
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	40
	604	38.2	105	1	TYPE	K
	589	39.1	102.5	2	Cooling Refroidissement	ANN
	575	40.2	100	3	Temp. Rise Echauffement	130 °C
	561	41.2	97.5	4	Temp. Class Classe de Temp.	200 °C
	546	42.3	95	5	Frequency Fréquence	60 Hz
LV/BT	460Y/265V				Impédance % @ 150 °C	4.8
BIL	-				Encl. Type Type de boîtier	NEMA-3R
TERM. BORNES	X0 X1 X2 X3				Wt Poids	355 lbs
					Winding Enroulement	CU

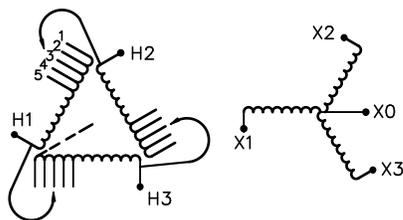

4003102b



THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.




TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

1	21/07/16	PP	EDB UPDATE	DES: MBURSAC
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM040NJCN

1.0 http://2026/05/17 06:35

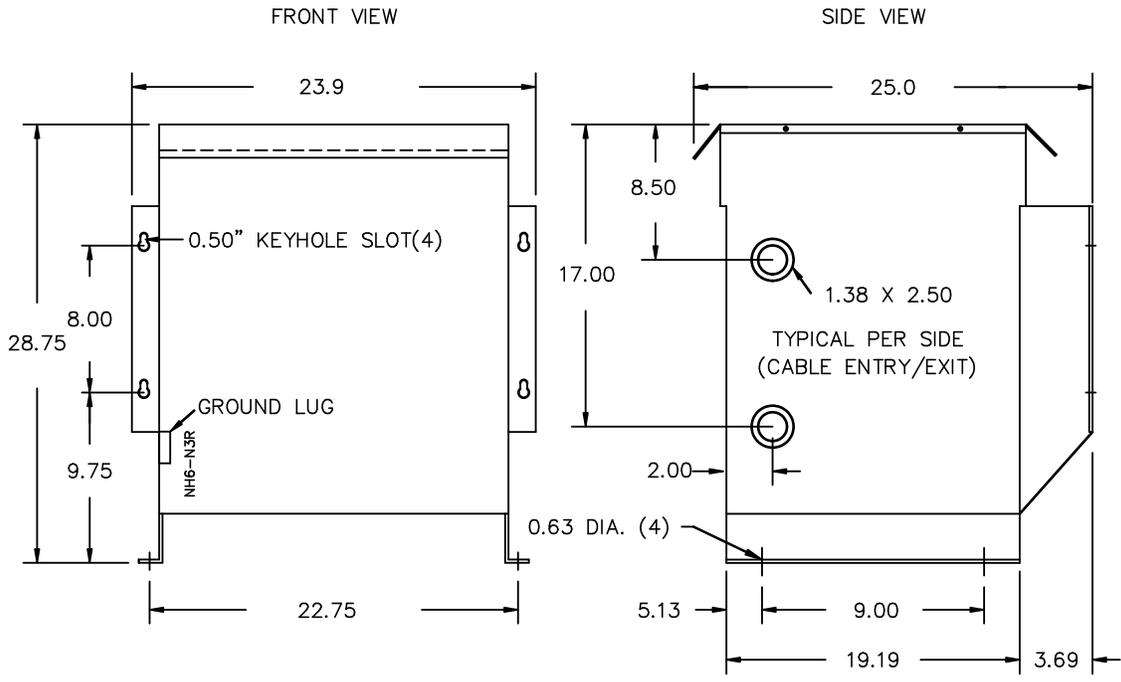

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14-2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-”NC”-THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DISTRIBUTION TRANSFORMER

1	21/07/16	PP	EDB UPDATE	DES: MBURSAC
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM040NJCIN