



® LR 3902

UL DRY TYPE TRANSFORMER 774J5 E112313


LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

| | | | | | | |
|--------------|-------------------|--------------------|---|--|------------------------------|---------|
| HV/HT | 230V | | | | Cust. Ref. Réf. du client | |
| BIL | - | | | | Serial No. No. de série | |
| TERM. BORNES | H1 H2 H3 | | | | Part No. No. de pièce | DM051CC |
| | VOLTS | CURRENT COURANT | % RATED VOLTAGE % TENSION NOMINALE | CONNECTION EACH PHASE CONNEXION PAR PHASE | kVA | 51 |
| | 242 230 218 | 122 128 135 | 105 100 95 | 1 2 3 | TYPE | K |
| | 230Y/133V | | | | LV/BT | |
| | - | | | | BIL | |
| TERM. BORNES | X0 X1 X2 X3 | | | | Wt Poids | 380 lbs |
| | | | | | Winding Enroulement | AL |

| | |
|--------------------------------|--------|
| Cooling Refroidissement | ANN |
| Temp. Rise Echauffement | 150 °C |
| Temp. Class Classe de Temp. | 220 °C |
| Frequency Fréquence | 60 Hz |
| Impédance % @ 170 °C | 4.9 |
| Encl. Type Type de boîtier | 3R |

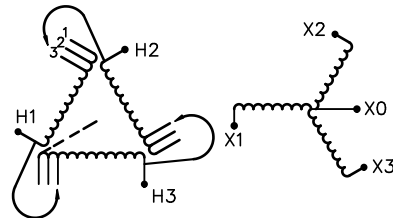

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b



| | | | | |
|--|----------|----|------------|----------------|
| TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION | | | | |
| 5 | 21/07/13 | PP | EDB UPDATE | DES: MBURSAC |
| 4 | 15/08/10 | RM | HCN: 60717 | DATE: 01/01/24 |
| NO. | DATE | BY | REVISION | SCALE: NTS |

SHEET 1 OF 2
EDBDM051CC

5.0 httpd 2026/06/24 23:45 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

| | | | | |
|-----|----------|----|------------|----------------|
| 5 | 21/07/13 | PP | EDB UPDATE | DES: MBURSAC |
| 4 | 15/08/10 | RM | HCN: 60717 | DATE: 01/01/24 |
| NO. | DATE | BY | REVISION | SCALE: NTS |

SHEET 2 OF 2

EDBDM051CC

5.0 httpd 2026/06/24 23:45 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.