



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480Y/277V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H0 H1 H2 H3				Part No. No. de pièce	DM063BK
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	63
	218 208 198	167 175 184	105 100 95	1 2 3	TYPE	K
	208V				LV/BT	
	-				BIL	
	X1 X2 X3				TERM. BORNES	
					Cooling Refroidissement	ANN
					Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	5.7
					Encl. Type Type de boîtier	3R
					Wt Poids	475 lbs
					Winding Enroulement	AL

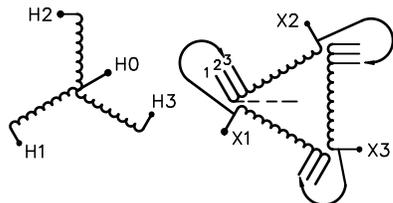

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES

d003102b




TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION


4	21/07/13	PP	EDB UPDATE	DES: JWEN
3	16/12/21	DC	UPDATED DWGS(HCN 64-715)	DATE: 06/06/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM063BK

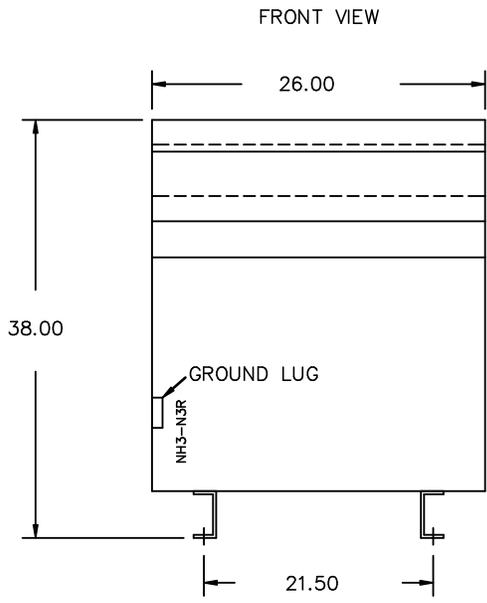

All Dimensions in inches

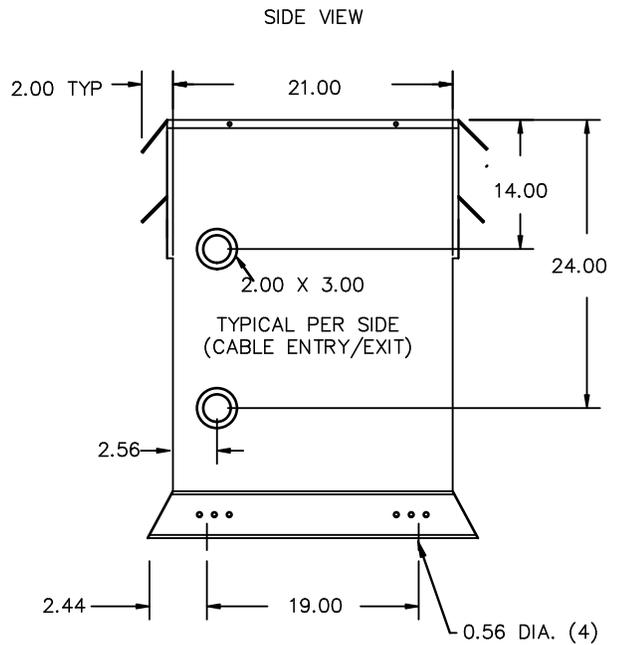

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT BOTTOM FRONT
- LV TERMINATED AT TOP FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

4	21/07/13	PP	EDB UPDATE	DES: JWEN
3	16/12/21	DC	UPDATED DWGS(HCN 64715)	DATE: 06/06/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM063BK