




GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V				Cust. Ref.	
BIL	-				Serial No.	
TERM. BORNES	H1 H2 H3				Part No.	DM075JJS
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	75
	483 460 437	89.7 94.1 99.1	105 100 95	1 2 3	TYPE	K
					Cooling Refroidissement	ANN
					Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	5.9
LV/BT	460Y/266V				Encl. Type Type de boîtier	3R
BIL	-				Wt Poids lbs/kg	550/250
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	AL

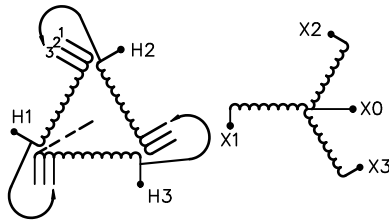

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND
ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES
ELECTROSTATIC SHIELD

d003102b




TITLE: 3PH DRIVE TRANSFORMER
NAMEPLATE INFORMATION


5	21/07/16	PP	EDB UPDATE	DES: EBULIN
4	17/10/05	RM	CHANGED NPL VER:	DATE: 00/03/03
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM075JJS

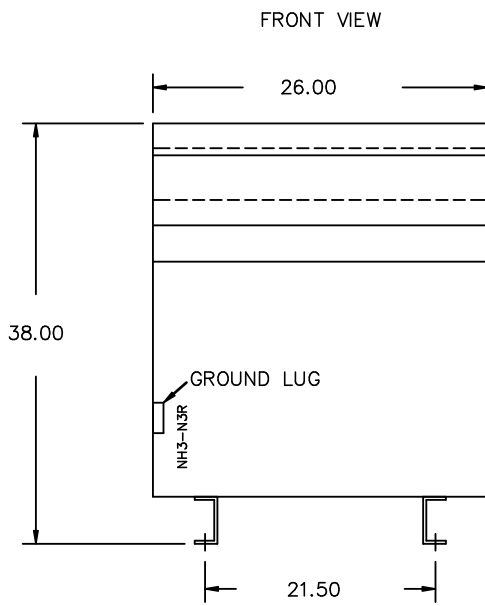

All Dimensions in inches

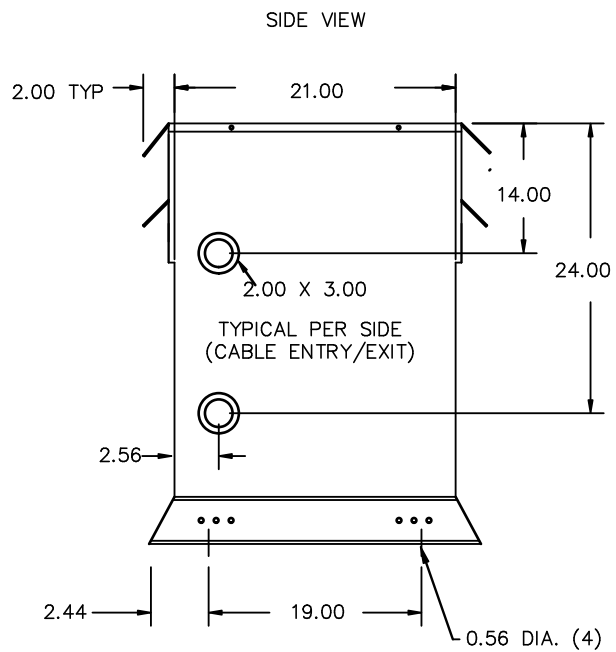

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0-14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

5	21/07/16	PP	EDB UPDATE	DES: EBULIN
4	17/10/05	RM	CHANGED NPL VER:	DATE: 00/03/03
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM075JJS

5.0 httpd 2026/07/24 09:15

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.