



Hammond Power
Solutions Inc.

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX




DRY TYPE
TRANSFORMER
77U5
E112313
LISTED

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASÉ POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref.	
BIL	-				Réf. du client	
TERM. BORNES	H1 H2 H3				Serial No.	
					No. de série	
					Part No.	DM093NJC
					No. de pièce	
					kVA	93
					TYPE	K
					Cooling	ANN
					Refroidissement	
					Temp. Rise	150 ° C
					Echauffement	
					Temp. Class	220 ° C
					Classe de Temp.	
					Frequency	60 Hz
					Fréquence	
					Impédance %	3.4
					@ 170 ° C	
					Encl. Type	NEMA-3R
					Type de boîtier	
					Wt LBS	780
					Poids en lbs.	
					Winding	CU
					Enroulement	

SPACINGS BETWEEN ENCLOSURE AND ANY ADJACENT
WALL SHALL BE A MINIMUM OF 6 INCHES

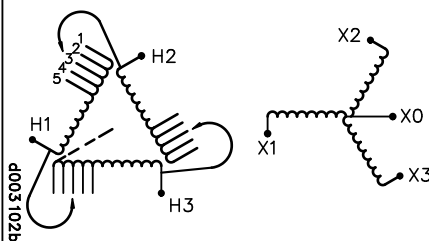

Hammond Power
Solutions Inc.


TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

1	02/09/26	MB	HCN: 17028	DES: PSTRNAD
				DATE: 00/09/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM093NJC

1.1 Jwen 2009/08/13 00:02

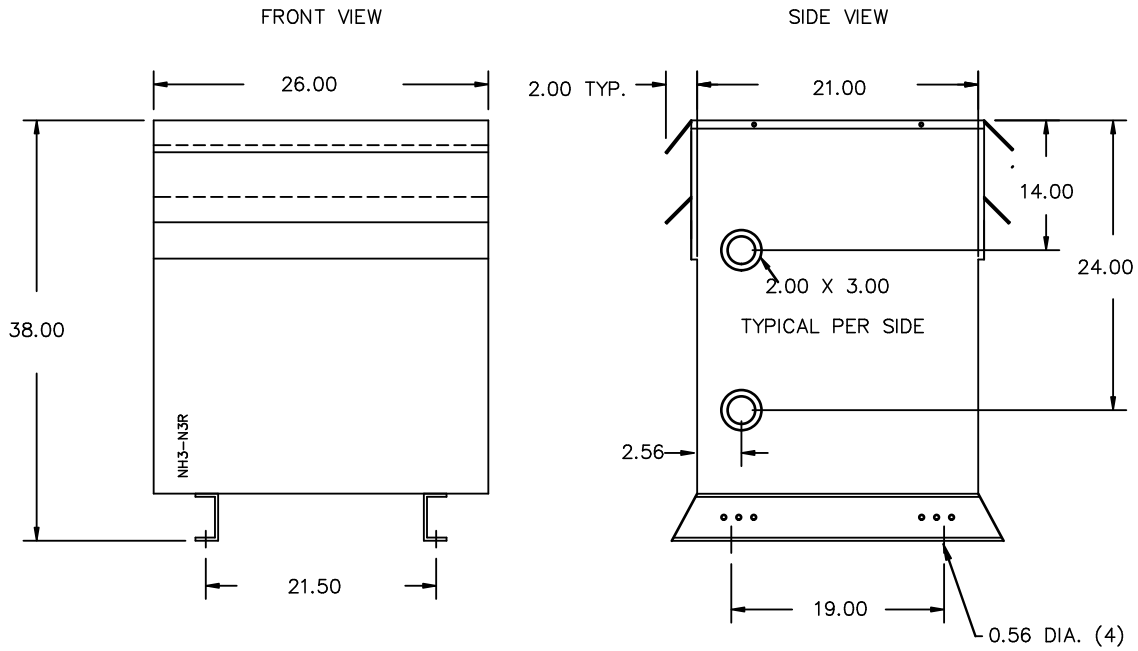

All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"-THERMOSTAT PER COIL CONNECTED TO T.B.



**Hammond Power
Solutions Inc.**

TITLE: 3PH DISTRIBUTION TRANSFORMER

1	02/09/26	MB	HCN:17028	DES: PSTRNAD
				DATE: 00/09/05
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM093NJJC

1.1 Jwen 2009/08/13 06:02