




LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM118KKC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	118
	504	135	105	1	TYPE	K
	480	142	100	2	Cooling Refroidissement	ANN
	456	149	95	3	Temp. Rise Echauffement	150 °C
					Temp. Class Classe de Temp.	220 °C
					Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	3.6
LV/BT	480Y/277V				Encl. Type Type de boîtier	3R
BIL	-				Wt Poids	785 lbs
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	CU

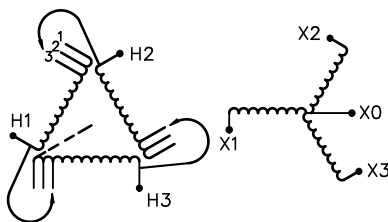

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

4003102b



TITLE: 3PH DRIVE TRANSFORMER
 NAMEPLATE INFORMATION

5	21/07/13	PP	EDB UPDATE	DES: LRIOLA
4	13/11/07	DC	UPDATED DWGS(HCN 47603)	DATE: 01/12/11
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM118KKC

5.0 http://www.hammond.com/2026/04/04/19-01 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY- OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 250MCM-6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

5	21/07/13	PP	EDB UPDATE	DES: LRIOLA
4	13/11/07	DC	UPDATED DWGS(HCN 47603)	DATE: 01/12/11
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM118KCC