




GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	230V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM175CC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	175
	242 230 218	4.18 4.39 4.62	105 100 95	1 2 3	TYPE	K
	230Y/133V				Cooling Refroidissement	ANN
LV/BT					Temp. Rise Echauffement	150 °C
BIL	-				Temp. Class Classe de Temp.	220 °C
TERM. BORNES	X0 X1 X2 X3				Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	6.2
					Encl. Type Type de boîtier	3R
					Wt Poids	975 lbs
					Winding Enroulement	AL

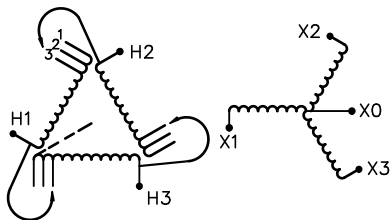

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

4003102b





TITLE: 3PH DRIVE TRANSFORMER
 NAMEPLATE INFORMATION

2	21/07/16	PP	EDB UPDATE	DES: GPATEL
1	14/06/04	GP	HCN: 42500	DATE: 05/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM175CC

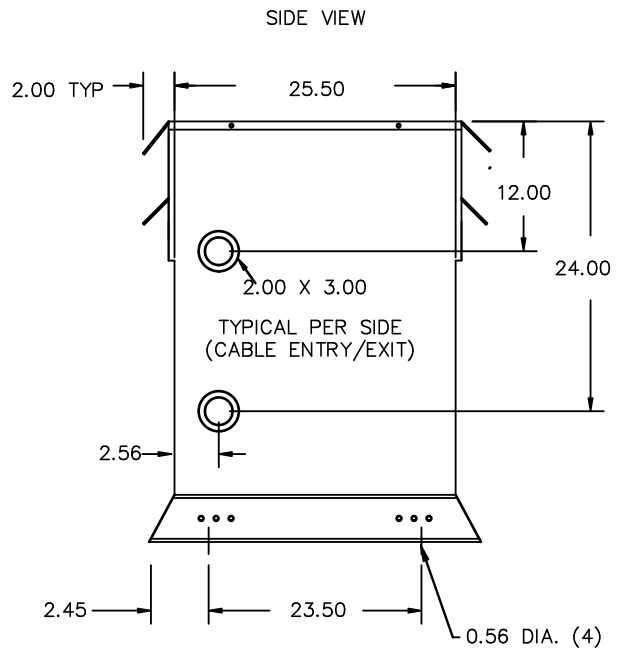
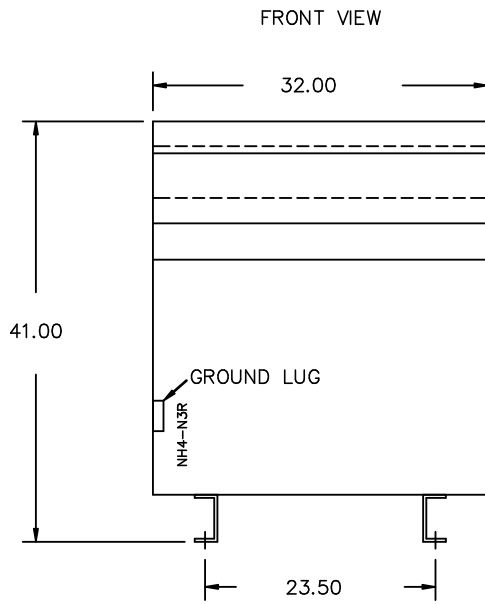


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL

L.V.1. TERMINAL DETAIL



CUSTOMER NOTES:

- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT
- C/W 1-”NC”- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE:		3PH DRIVE TRANSFORMER		
2	21/07/16	PP	EDB UPDATE	DES: GPATEL
1	14/06/04	GP	HCN: 42500	DATE: 05/08/17
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM175CC