




GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V			Cust. Ref. Réf. du client	
BIL	-			Serial No. No. de série	
TERM. BORNES	H1 H2 H3			Part No. No. de pièce	DM220JJC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA
	483	263	105	1	220
	472	269	102.5	2	TYPE
	460	276	100	3	K
	448	283	97.5	4	Cooling Refroidissement
	437	291	95	5	ANN
					Temp. Rise Echauffement
					150 °C
					Temp. Class Classe de Temp.
					220 °C
					Frequency Fréquence
					60 Hz
					Impédance % @ 170 °C
					4.3
LV/BT	460Y/266V			Encl. Type Type de boîtier	3R
BIL	-			Wt Poids	1450
TERM. BORNES	X0 X1 X2 X3			Winding Enroulement	CU

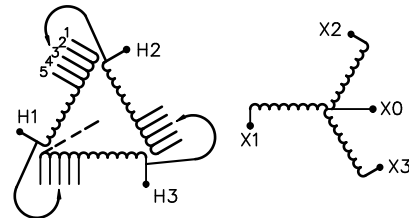

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES EXCEPT WHEN WALL MOUNTED USING APPROVED WALL MOUNTING KIT

d003102b



THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.



TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION				
7	21/07/16	PP	EDB UPDATE	DES: EBULIN
6	17/06/06	RM	CHANGED NPL VER:	DATE: 99/07/15
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2
EDBDM220JJC

7.0 httpd 2026/06/04 10:27




All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM-6 CU/AL
CONDUCTORS
2 CONDUCTORS PER PHASE



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-”NC”- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

7	21/07/16	PP	EDB UPDATE	DES: EBULIN
6	17/06/06	RM	CHANGED NPL VER:	DATE: 99/07/15
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM220JJC