




GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480V			Cust. Ref. Réf. du client	
BIL	-			Serial No. No. de série	
TERM. BORNES	H1 H2 H3			Part No. No. de pièce	DM220KDC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA
	513	248	106.8	1	220
	496	256	103.4	2	TYPE
	480	265	100	3	K
	464	274	96.6	4	Cooling Refroidissement
	447	284	93.2	5	ANN
					Temp. Rise Echauffement
					150 °C
					Temp. Class Classe de Temp.
					220 °C
					Frequency Fréquence
					60 Hz
					Impédance % @ 170 °C
					4
LV/BT	240Y/139V 529A			Encl. Type Type de boîtier	3R
BIL	-			Wt lbs/kg	1460/663
TERM. BORNES	X0 X1 X2 X3			Winding Enroulement	CU

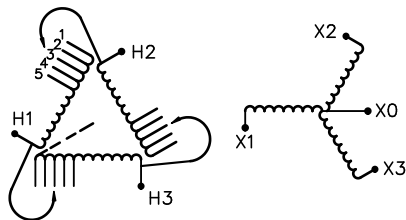

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

4003102b





TITLE: 3PH DRIVE TRANSFORMER
 NAMEPLATE INFORMATION

2	26/03/02	AO	EDB UPDATE	DES: MABDELAT
1	21/07/13	PP	EDB UPDATE	DATE: 17/08/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EDBDM220KDC

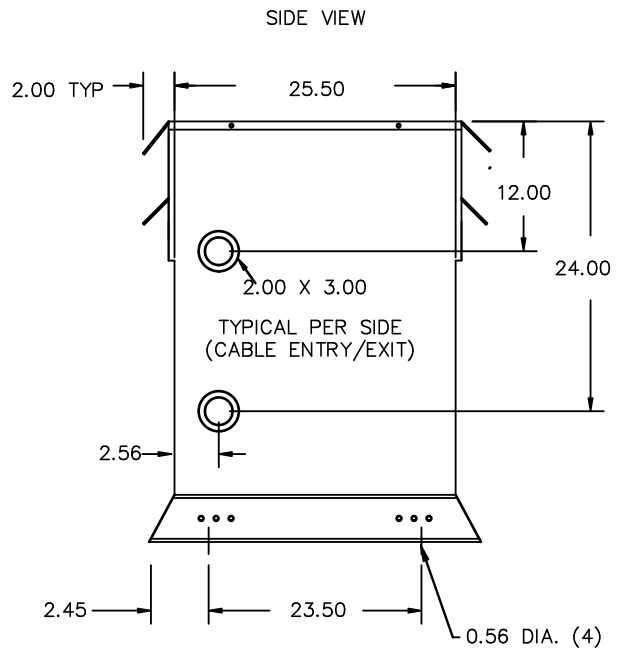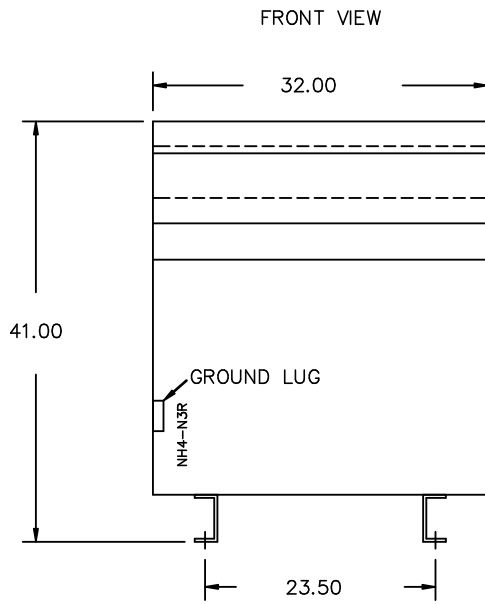


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM-6 CU/AL
CONDUCTORS
2 CONDUCTORS PER PHASE



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-”NC”- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

2	26/03/02	AO	EDB UPDATE	DES: MABELLAT
1	21/07/13	PP	EDB UPDATE	DATE: 17/08/31
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM220KDC