



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480V			Cust. Ref. Réf. du client	
BIL	-			Serial No. No. de série	
TERM. BORNES	H1 H2 H3			Part No. No. de pièce	DM330KDC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA
	504	378	105	1	330
	492	387	102.5	2	TYPE
	480	397	100	3	K
	468	407	97.5	4	Cooling Refroidissement
	456	418	95	5	ANN
					Temp. Rise Echauffement
					150 °C
					Temp. Class Classe de Temp.
					220 °C
					Frequency Fréquence
					60 Hz
					Impédance % @ 170 °C
					5.7
LV/BT	240Y/139V			Encl. Type Type de boîtier	3R
BIL	-			Wt Poids	1900
TERM. BORNES	X0 X1 X2 X3			Winding Enroulement	CU

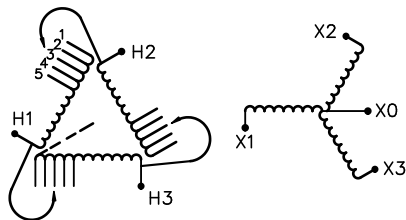

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

4003102b



TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

1	21/07/13	PP	EDB UPDATE	DES: MABDELAT
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2

EJBDM330KDC

FRONT VIEW



\*\* - Recommended cable entry locations only  
cutouts & gland plates not provided.


SIDE VIEW




All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

HV TERMINAL DETAIL

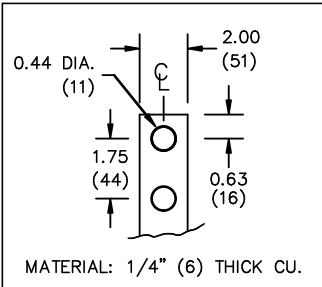

LV TERMINAL DETAIL

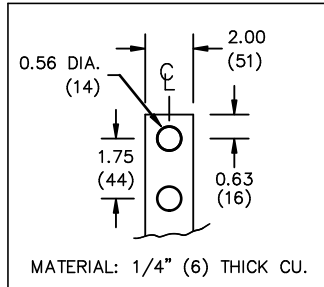

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

1	21/07/13	PP	EDB UPDATE	DES: MABDELAT
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM330KDC