




GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
 TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	480V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM330KK
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	330
	504	378	105	1	TYPE	K
	492	387	102.5	2	Cooling Refroidissement	ANN
	480	397	100	3	Temp. Rise Echauffement	150 °C
	468	407	97.5	4	Temp. Class Classe de Temp.	220 °C
	456	418	95	5	Frequency Fréquence	60 Hz
LV/BT	480Y/277V				Impédance % @ 170 °C	5
BIL	-				Encl. Type Type de boîtier	3R
TERM. BORNES	X0 X1 X2 X3				Wt Poids	1650 lbs
					Winding Enroulement	AL

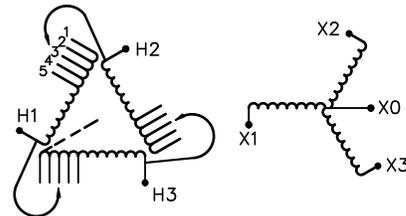

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

D003102b




TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION				
3	21/07/16	PP	EDB UPDATE	DES: PSTRNAD
2	04/07/27	GP	HCN: 19609	DATE: 00/06/12
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2  
 EDBDM330KK


3.0 httpd 2026/05/28 13:22 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

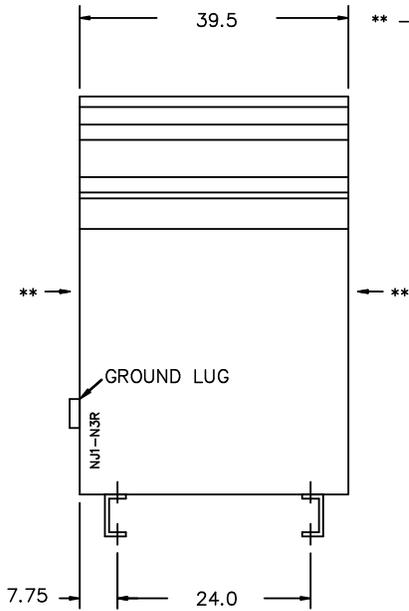

\*\* - Recommended cable entry locations only  
cutouts & gland plates not provided.


SIDE VIEW

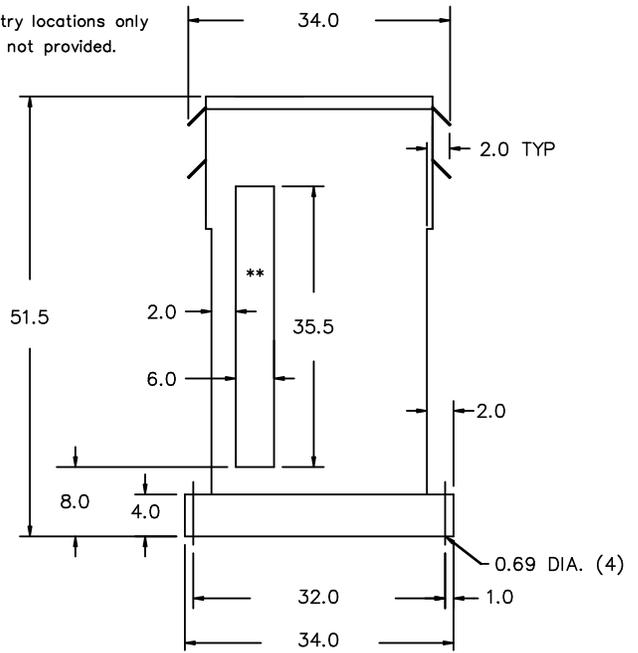


All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

HV TERMINAL DETAIL

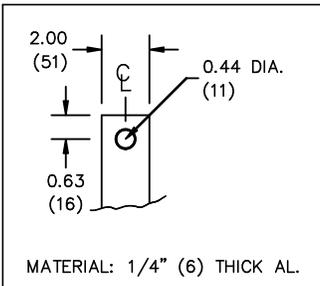

LV TERMINAL DETAIL

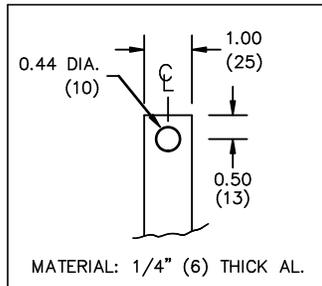

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

3	21/07/16	PP	EDB UPDATE	DES: PSTRNAD
2	04/07/27	GP	HCN: 19609	DATE: 00/06/12
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM330KK