



® LR 3902


UL DRY TYPE TRANSFORMER 774J5 E112313

LISTED

GUELPH, ONT. BARABOO, WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER  
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	575V				Cust. Ref. Réf. du client	
BIL	-				Serial No. No. de série	
TERM. BORNES	H1 H2 H3				Part No. No. de pièce	DM330NJC
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	330
	604	316	105	1	TYPE	K
	589	323	102.5	2	Cooling Refroidissement	ANN
	575	331	100	3	Temp. Rise Echauffement	150 °C
	561	340	97.5	4	Temp. Class Classe de Temp.	220 °C
	546	349	95	5	Frequency Fréquence	60 Hz
					Impédance % @ 170 °C	6.4
LV/BT	460Y/266V				Encl. Type Type de boîtier	3R
BIL	-				Wt Poids lbs/kg	1810/822
TERM. BORNES	X0 X1 X2 X3				Winding Enroulement	CU

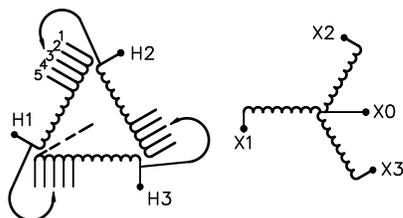

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES

d003102b




TITLE: 3PH DRIVE TRANSFORMER  
NAMEPLATE INFORMATION

				DES: RMOVVA
				DATE: 23/09/18
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2


EJBDM330NJC

FRONT VIEW

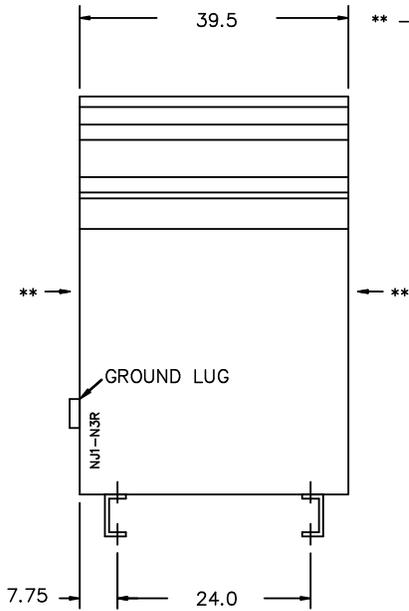

\*\* - Recommended cable entry locations only  
cutouts & gland plates not provided.


SIDE VIEW

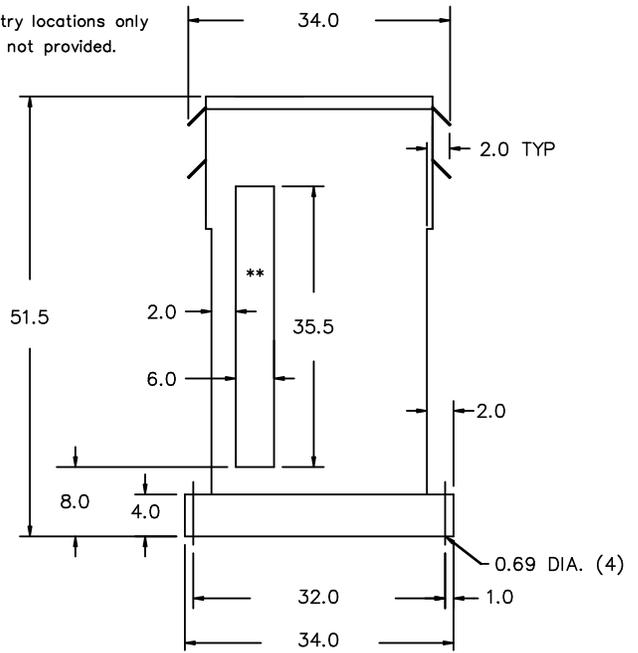


All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

HV TERMINAL DETAIL

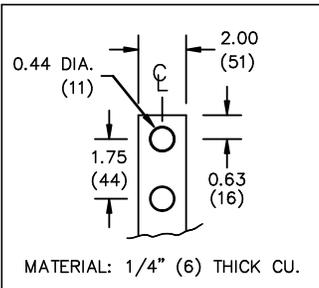

LV TERMINAL DETAIL

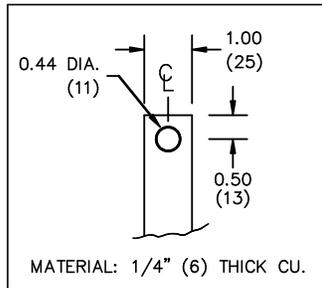

CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

DES:	RMOVVA		
DATE:	23/09/18		
SCALE:	NTS		
NO.	DATE	BY	REVISION

SHEET 2 OF 2

EDBDM330NJC