




® LR 3902

UL DRY TYPE TRANSFORMER 77JUS E112313 LISTED

GUELPH, ONT. BARABOO,WI COMPTON, CA MONTERREY, MX

THREE PHASE DRY TYPE DRIVE ISOLATION TRANSFORMER
TRANSFORMATEUR TRIPHASE POUR VARIATEUR DE VITESSE DE MOTEURS

HV/HT	460V			Cust. Ref. Réf. du client		
BIL	-			Serial No. No. de série		
TERM. BORNES	H1 H2 H3			Part No. No. de pièce	DM440JJ	
	VOLTS	CURRENT COURANT	% RATED VOLTAGE % TENSION NOMINALE	CONNECTION EACH PHASE CONNEXION PAR PHASE	kVA	440
	483	526	105	1-2	TYPE	K
	472	539	102.5	2-3	Cooling Refroidissement	ANN
	460	552	100	3-4	Temp. Rise Echauffement	150 °C
	448	566	97.5	4-5	Temp. Class Classe de Temp.	220 °C
	437	581	95	5-6	Frequency Fréquence	60 Hz
LV/BT	460Y/266V			Impédance % @ 170 °C	5.7	
BIL	-			Encl. Type Type de boîtier	3R	
TERM. BORNES	X0 X1 X2 X3			Wt Poids	2600	
				Winding Enroulement	AL	

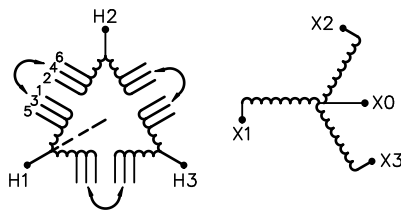

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 8.25 INCHES

d003102b




TITLE: 3PH DRIVE TRANSFORMER NAMEPLATE INFORMATION				
9	21/07/13	PP	EDB UPDATE	DES: CSUBRT
8	16/05/30	JF	GENERAL UPDATE [HCN 63265]	DATE: 99/08/18
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 2
EDBDM440JJ


9.0 http://2026/07/11 19:03 THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

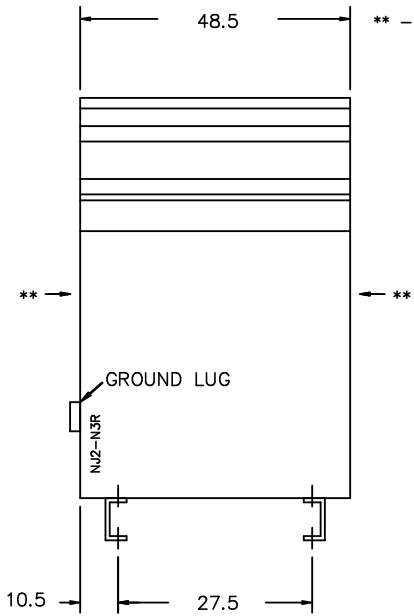

** - Recommended cable entry locations only
cutouts & gland plates not provided.


SIDE VIEW

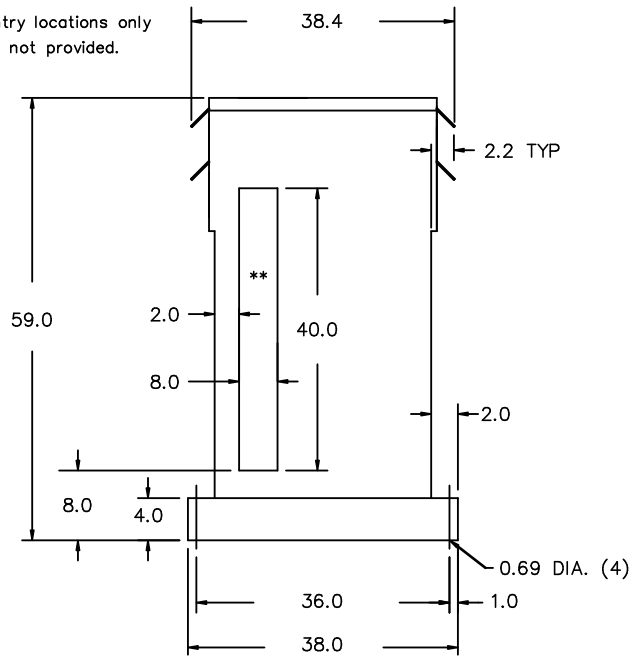


All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY - OUTDOOR

HV TERMINAL DETAIL

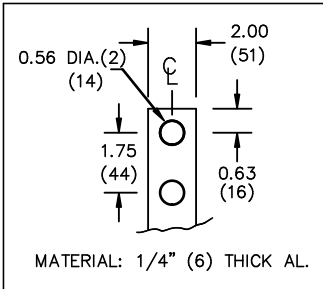

LV TERMINAL DETAIL



CUSTOMER NOTES:

- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- C/W 1-"NC"- THERMOSTAT PER COIL CONNECTED TO T.B.



TITLE: 3PH DRIVE TRANSFORMER

9	21/07/13	PP	EDB UPDATE	DES: CSUBRT
8	16/05/30	JF	GENERAL UPDATE [HCN 63265]	DATE: 99/08/18
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 2 OF 2

EDBDM440JJ