
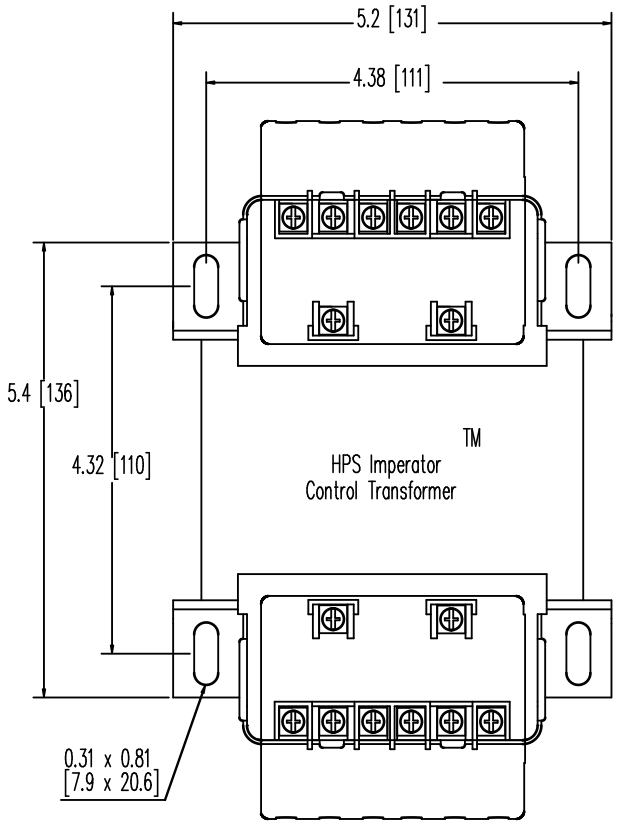


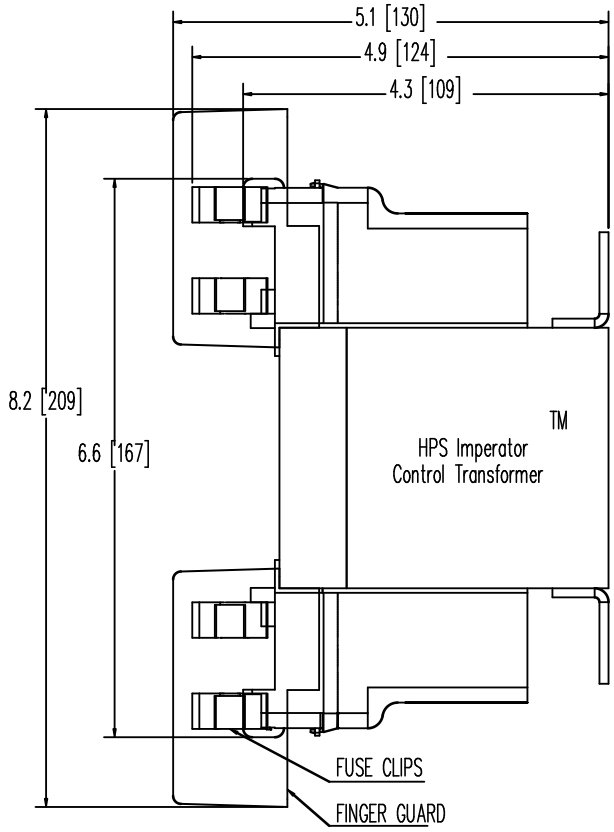

* TOLERANCES STD. + /- 0.1 INCHES[+/- 3 MM]
* ALL DIMENSIONS IN INCHES[MM]

* SECONDARY FUSE CLIPS ARE SUPPLIED LOOSE WITH TRANSFORMER
* PRIMARY FUSE CLIPS ARE OPTIONAL
* PRIMARY AND SECONDARY FINGER GUARD ARE OPTIONAL


hammond
POWER SOLUTIONS

750 VA
50/60 Hz
80 °C RISE

HV: 220V 230V 240V — 2 3 4 5 | 440V 460V 480V — 2 3 4 5

LV: 5 4 3 2 — 110V 115V 120V | 5 4 3 2 — 220V 230V 240V

CAT.NO.
PH750MQMJ
c UL us LISTED 252L
E50394
130-6
INDUSTRIAL CONTROL TRANSFORMER



CE
np1390-1c
MADE IN CHINA
CUST. REF.
PATENT PENDING

NOTES:

				DES: WWONG	
				DATE: 07/06/18	
NO.	DATE	BY	REVISION	SCALE: NTS	

hammond
POWER SOLUTIONS

TITLE: 1 PHASE CONTROL TRANSFORMER

SHEET 1 OF 1

EDBPH750MQMJ

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

0.1 httpd 2026/11/05 05:03