hammond POWER SOLUTIONS

Energy Efficient
General Purpose Distribution Transformer
Transformateur de Distribution
à usage général économe en énergie

Hyderabad, IN | Guelph, ONT / Compton, CA | Baraboo, WI / Monterrey, MX

Part No. SG3A0300KK0C

LR 3902

DRY TYPE TRANSFORMER 77US E112313 LISTED


ALSO VERIFIED IN ACCORDANCE TO ENERGY STANDARD C802.2-18 BY UNDERWRITERS LABORATORIES INC.® 3VJ6

8 03423 12819 7

| | | | |
|---|---|---|---|
| Cust. Ref. / Ref. du Client | | Serial No. / No. de Serie | |
| Phase | 3 | HV/HT | 480V |
| Type | K | BIL | 10 kV |
| Cooling / Refroidissement | ANN | Term / Bornes | H1 H2 H3 |
| kVA | 300 | LV/BT | 480Y/277V |
| Temp. Rise / Echauffement | 150 °C | BIL | 10 kV |
| Temp Class / Classe Temp | 220 °C | Term / Bornes | X0 X1 X2 X3 |
| Winding / Enroulement | CU | Energy Regulations | DOE 10 CFR PART 431:2016 |
| Frequency / Frequence Hz | 60 | Reglements de Energetique | CEE ACT SOR/2018-201 |
| Impedance % @ 170 °C | 3.2 | | |
| Encl Type / Type De Coffrage | 3R | | |
| Weight / Poids lbs | 1950 | | |

| VOLTS | CURRENT / COURANT | % RATED VOLTAGE / % TENSION NOMINALE | CONNECTION EACH PHASE / CONNEXION PAR PHASE |
|---|---|---|---|
| 504 | 344 | 105 | 1 |
| 492 | 352 | 102.5 | 2 |
| 480 | 361 | 100 | 3 |
| 468 | 370 | 97.5 | 4 |
| 456 | 380 | 95 | 5 |
| 444 | 390 | 92.5 | 6 |
| 432 | 401 | 90 | 7 |

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 5 INCHES EXCEPT WHEN WALL MOUNTED USING APPROVED WALL MOUNTING KIT




SEISMIC QUALIFICATIONS:
AS FLOOR MOUNT ONLY
IBC 2018/ASCE 7-16
SDS<=2.0g Z/h=0 Ip=1.5

d000186hb

TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 4 | 21/11/25 | CS | NPL IMPEDANCE AND WEIGHT UPDATE |
| 3 | 21/07/16 | PP | EDB UPDATE |

SCALE: NTS DATE: 16/01/11 DES.: ASETH


SHEET 1 OF 3

EDB SG3A0300KK0C


4.0 httpd 2026/11/05 05:26

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

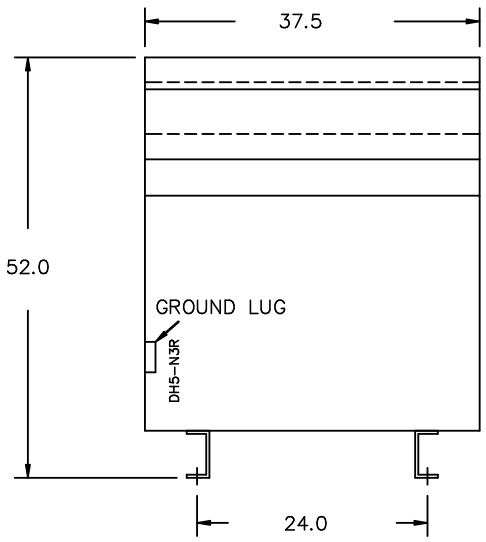



SIDE VIEW

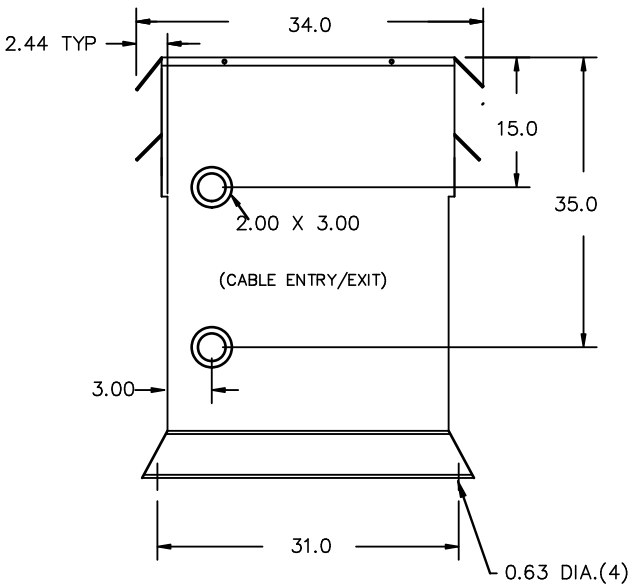



All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

H.V.1. TERMINAL DETAIL




L.V.1. TERMINAL DETAIL




CUSTOMER NOTES:
- HV1 TERMINATED AT TOP FRONT
- LV1 TERMINATED AT BOTTOM FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

4.0 httpd 2026/11/05 05:26

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER


| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 4 | 21/11/25 | CS | NPL IMPEDANCE AND WEIGHT UPDATE |
| 3 | 21/07/16 | PP | EDB UPDATE |

DES: ASETH
DATE: 16/01/11
SCALE: NTS



EDBSG3A0300K0C

ENCLOSURE BOTTOM VIEW

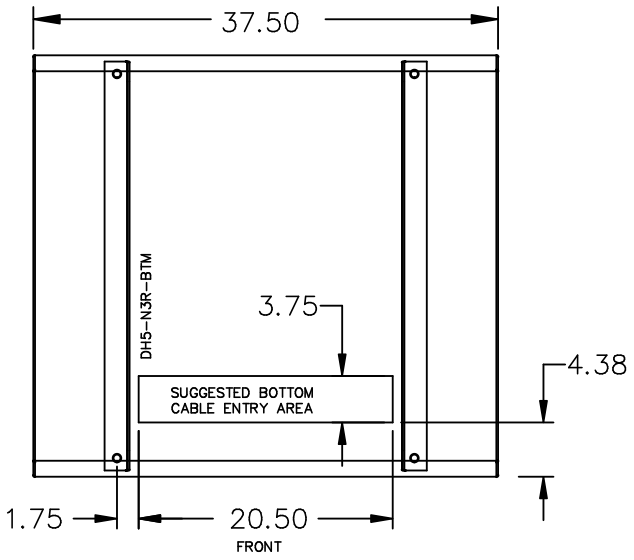


NOTE:
WHEN BOTTOM CABLE ENTRY IS OPTED, THE SPACE USED FOR CONDUITS IN THE FRONT OF THE TRANSFORMER SHOULD NOT OBSTRUCT MORE THAN 50% OF THE FRONT AIR INTAKE AREA DEFINED BETWEEN THE BOTTOM PLATE AND THE SUPPORTING LEGS.
SEE MANUAL FOR ADDITIONAL INFORMATION

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

4.0 httpd 2026/11/05 05:26

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER ENCLOSURE BOTTOM VIEW

| NO. | DATE | BY | REVISION | |
|---|---|---|---|---|
| 4 | 21/11/25 | CS | NPL IMPEDANCE AND WEIGHT UPDATE | DES: ASETH |
| 3 | 21/07/16 | PP | EDB UPDATE | DATE: 16/01/11 |
| | | | | SCALE: NTS |

SHEET 3 OF 3

EDBSGA030KKOC