hammond POWER SOLUTIONS

Energy Efficient
General Purpose Distribution Transformer
Transformateur de Distribution
à usage général économe en énergie

Hyderabad, IN | Guelph, ONT | Compton, CA | Baraboo, WI | Monterrey, MX

Part No. SG3C0075KD

LR 3902

DRY TYPE TRANSFORMER 77U5 E112313 LISTED


ALSO VERIFIED IN ACCORDANCE TO ENERGY STANDARD C802.2-18 BY UNDERWRITERS LABORATORIES INC.® 3VJ6

8 03423 12422 9

| | | | |
|---|---|---|---|
| Cust. Ref. / Ref. du Client | | Serial No. / No. de Serie | |
| Phase | 3 | HV/HT | 480V 90.2A |
| Type | K | BIL | 10 kV |
| Cooling / Refroidissement | ANN | Term / Bornes | H1 H2 H3 |
| kVA | 75 | LV/BT | 240V 180A |
| Temp. Rise / Echauffement | 150 °C | BIL | 10 kV |
| Temp Class / Classe Temp | 220 °C | Term / Bornes | X1 X2 X3 |
| Winding / Enroulement | AL | Energy Regulations | DOE 10 CFR PART 431:2016 |
| Frequency / Frequence Hz | 60 | Reglements de Energetique | CEE ACT SOR/2018-201 |
| Impedance % @ 170 °C | 5.6 | | |
| Encl Type / Type De Coffrage | 3R | | |
| Weight / Poids lbs | 565 | | |

| VOLTS | CURRENT / COURANT | % RATED VOLTAGE / % TENSION NOMINALE | CONNECTION EACH PHASE / CONNEXION PAR PHASE |
|---|---|---|---|
| 504 | 85.9 | 105 | 1 |
| 492 | 88.0 | 102.5 | 2 |
| 480 | 90.2 | 100 | 3 |
| 468 | 92.5 | 97.5 | 4 |
| 456 | 95.0 | 95 | 5 |
| 444 | 97.5 | 92.5 | 6 |
| 432 | 100.2 | 90 | 7 |

SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 3 INCHES
X6=120V CT, 5% OF KVA RATING MAXIMUM




SEISMIC QUALIFICATIONS:
AS FLOOR MOUNT ONLY
IBC 2018/ASCE 7-16
SDS<=2.0g Z/h=1 Ip=1.5

d000186hb

TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 3 | 21/07/16 | PP | EDB UPDATE |
| 2 | 20/03/17 | PP | SEISMIC UPDATE |

SCALE: NTS | DATE: 15/11/09 | DES: JWEN


SHEET 1 OF 3

EDBSG3C0075KD


3.0 httpd 2026/11/05 07:27

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

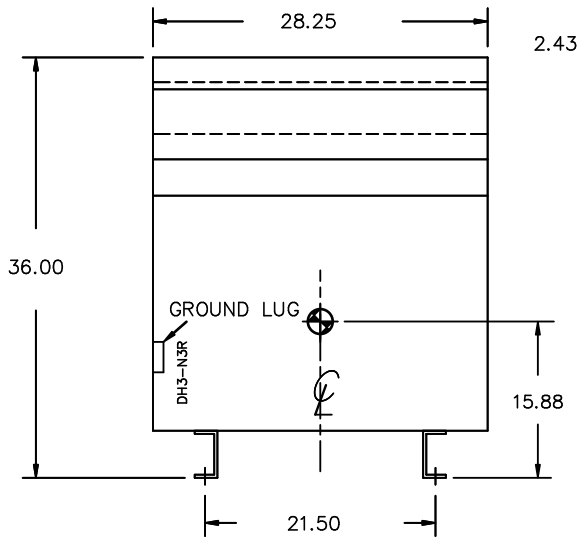


SIDE VIEW

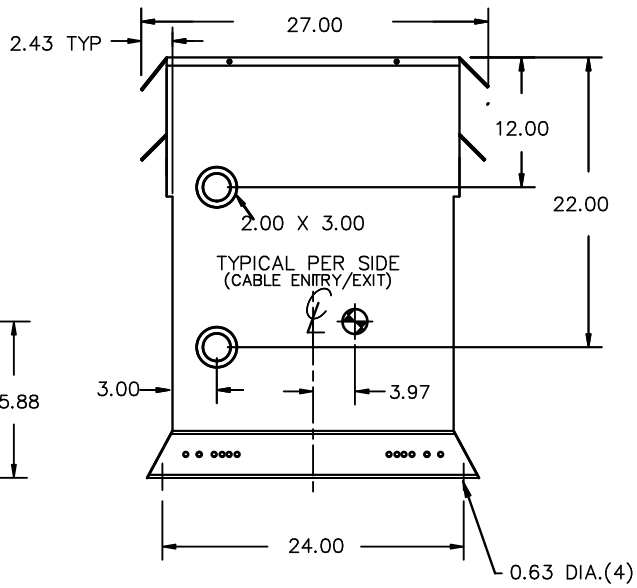


All Dimensions in inches

ENCLOSURE COLOR :ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #2/0–14 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

LV TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR 350MCM–6 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

X6 TERMINAL DETAIL

MECHANICAL TYPE LUGS INCLUDED
SUITABLE FOR #14–2 CU/AL
CONDUCTORS
1 CONDUCTOR PER PHASE

CUSTOMER NOTES:
- HV TERMINATED AT TOP FRONT
- LV TERMINATED AT BOTTOM FRONT
- X6 TERMINATED AT BOTTOM FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

3.0 httpd 2026/11/05 07:27

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER


| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 3 | 21/07/16 | PP | EDB UPDATE |
| 2 | 20/03/17 | PP | SEISMIC UPDATE |

DES: JWEN
DATE: 15/11/09
SCALE: NTS



EDBSG3C0075KD

ENCLOSURE BOTTOM VIEW

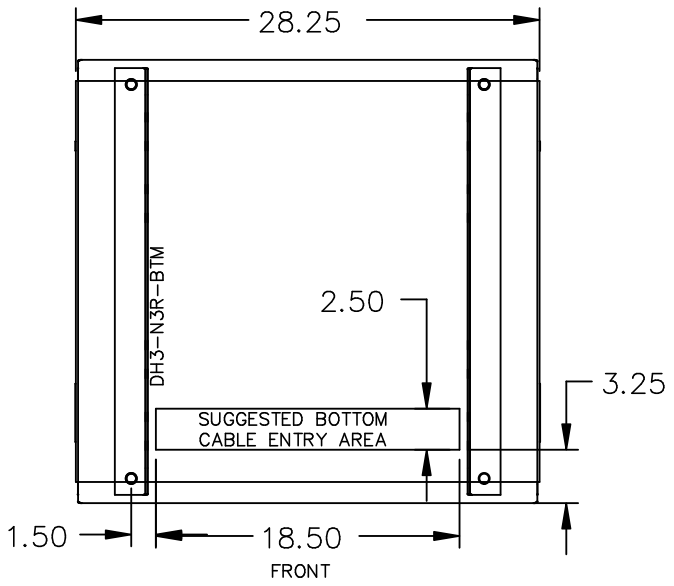


NOTE:
WHEN BOTTOM CABLE ENTRY IS OPTED, THE SPACE USED FOR CONDUITS IN THE FRONT OF THE TRANSFORMER SHOULD NOT OBSTRUCT MORE THAN 50% OF THE FRONT AIR INTAKE AREA DEFINED BETWEEN THE BOTTOM PLATE AND THE SUPPORTING LEGS.
SEE MANUAL FOR ADDITIONAL INFORMATION

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER ENCLOSURE BOTTOM VIEW

| NO. | DATE | BY | REVISION |
|---|---|---|---|
| 3 | 21/07/16 | PP | EDB UPDATE |
| 2 | 20/03/17 | PP | SEISMIC UPDATE |

DES: JWEN
DATE: 15/11/09
SCALE: NTS

SHEET 3 OF 3

EDBSC3C0075KD

3.0 httpd 2026/11/05 07:27