hammond POWER SOLUTIONS

HPS Titan™ N

Dry Type Encapsulated Transformer
Transformateur de Type Sec Encapsul

Guelph, ONT
Compton, CA
Baraboo, WI
Monterrey, MX


Part No. TN2A0009KBKF

c UL us LISTED
31GW E258346
GENERAL PURPOSE
TRANSFORMER FOR USE IN
HAZARDOUS LOCATIONS

8 03423 15098 3

Cust. Ref. / Ref. du Client		Serial No. / No. de Serie	
Phase	3	HV/HT	480V
Type	HZQT	BIL	10 kV
Cooling / Refroidissement	ANC	Term / Bornes	H1 H2 H3
kVA	9	LV/BT	208Y/120V 25A
Temp. Rise / Echauffement	115 °C	BIL	10 kV
Temp Class / Classe Temp	180 °C	Term / Bornes	X0 X1 X2 X3
Winding / Enroulement	CU		
Frequency / Frequence Hz	60		
Impedance % @ 135 °C	2.6		
Encl Type / Type De Coffrage	4		
Weight / Poids lbs	195		

VOLTS	CURRENT / COURANT	% RATED VOLTAGE / % TENSION NOMINALE	CONNECTION EACH PHASE / CONNEXION PAR PHASE
504	10.3	105	1–2
480	10.8	100	2–3
456	11.4	95	3–4



HAZARDOUS LOCATIONS CLASS 1, DIV 2
GROUPS A, B, C & D
TEMPERATURE CODE: T3A

HAZARDOUS LOCATIONS CLASS 1, ZONE 2
GROUPS IIC, T3
SPACINGS BETWEEN ANY VENTILATED ENCLOSURE PANEL AND ANY ADJACENT WALL SHALL BE A MINIMUM OF 1 INCHES
ELECTROSTATIC SHIELD

WARNING – EXPLOSION HAZARD. DO NOT DISCONNECT EQUIPMENT WHILE THE CIRCUIT IS LIVE OR UNLESS THE AREA IS FREE OF IGNITABLE CONCENTRATIONS.
AVERTISSEMENT : RISQUE D EXPLOSION. NE PAS D BRANCHER PENDANT QUE LE CIRCUIT EST SOUS TENSION OU MOINS QUE L EMPLACEMENT NE SOIT EXEMPT DE CONCENTRATIONS INFLAMMABLES.

SEISMIC QUALIFICATIONS:
OSP–0136/IBC 2018/ASCE 7–16
SDS<=2.0g Z/h=1 Ip=1.5

d0002006p

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER
NAMEPLATE INFORMATION

NO.	DATE	BY	REVISION
2	21/07/16	PP	EDB UPDATE
1	20/03/17	PP	SEISMIC UPDATE

SCALE: NTS
DATE: 19/01/09
DES.: PPICASSI


SHEET 1 OF 2

EDB TN2A0009KBKF


2.0 httpd 2026/11/05 20:35

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

FRONT VIEW

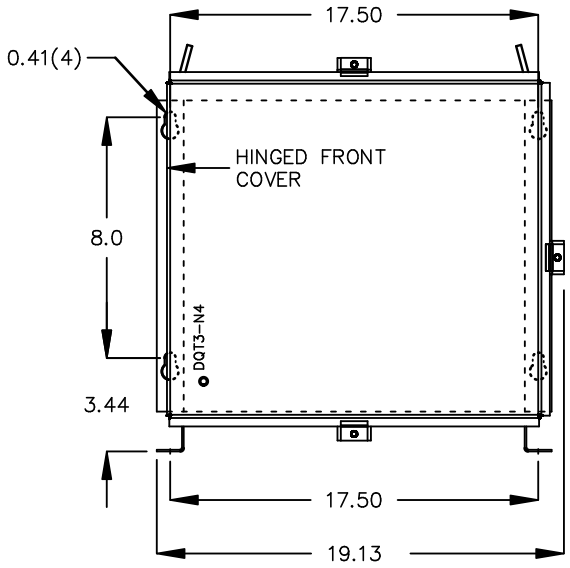

SIDE VIEW

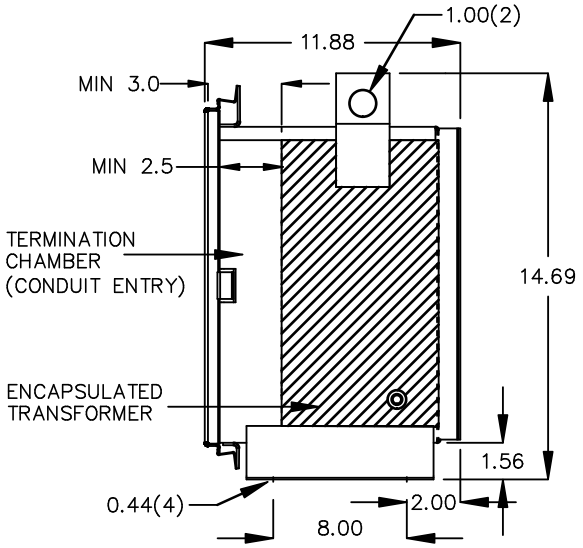

All Dimensions in inches

ENCLOSURE COLOR : ANSI 61 GREY – OUTDOOR

HV TERMINAL DETAIL

#14 AWG STRANDED COPPER WIRE LEADS

LV TERMINAL DETAIL

#12 AWG STRANDED COPPER WIRE LEADS

CUSTOMER NOTES:
- HV TERMINATED AT BOTTOM FRONT
- LV TERMINATED AT TOP FRONT

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.

hammond POWER SOLUTIONS

TITLE: 3PH DISTRIBUTION TRANSFORMER

NO.	DATE	BY	REVISION
2	21/07/16	PP	EDB UPDATE
1	20/03/17	PP	SEISMIC UPDATE

DES: PPICASSI
DATE: 19/01/09
SCALE: NTS

SHEET 2 OF 2

EDB TN2A0009KBKF

2.0 httpd 2026/11/05 20:35